

GREENHOUSE GAS FROM MOVING BED BASED INTEGRATED FIXED FILM ACTIVATED SLUDGE MEMBRANE BIOREACTORS

G. MANNINA*, M. CAPODICI*, A. COSENZA*, D. DI TRAPANI*, V.A. LAUDICINA**, H. ØDEGAARD***

* Dipartimento di Ingegneria Civile, Ambientale, Aerospaziale, dei Materiali, Università di Palermo, Palermo, Italy

** Dipartimento di Scienze Agrarie e Forestali, Università di Palermo, Palermo, Italy

*** Norwegian University of Science and Technology, Department of Hydraulic and Environmental Engineering, Trondheim, Norway

Keywords: Nitrous oxide; Emission factor; IFAS; MBR; UCT;

Abstract. *The present paper reports the results of a nitrous oxide production investigation in a moving bed based integrated fixed film activated sludge (IFAS) membrane bioreactor (MBR) pilot plant designed in accordance with the UCT layout for biological phosphorous removal. Samples of gas and liquid were collected in order to measure the gaseous, as well as the dissolved concentration of N_2O . Furthermore, the gas flow rate from each reactor was measured and the gas flux was estimated. The results confirmed that the anoxic reactor represents the main source of nitrous oxide production. A significant production of N_2O was, however, also found in the anaerobic reactor, thus indicating a probable occurrence of the DPAOs activity.*

1. Introduction

Nitrous oxide (N_2O) is a significant greenhouse gas (GHG) due to its high global warming potential (GWP), 298 times higher than that of carbon dioxide (CO_2), and to its capability to react with stratospheric ozone causing the layer depletion (IPCC, 2007). The requirement to protect the ozone layer led the governments worldwide to issue specific regulations and guidelines focused on the reduction of anthropogenic N_2O emissions. In this context N_2O emissions from wastewater treatment has received increasing attention in recent years.

N_2O can be produced and directly emitted from wastewater treatment plants (WWTPs). Specifically, N_2O generation mainly occurs in biological nitrogen removal (BNR) via nitrification and denitrification processes as both autotrophic and heterotrophic bacteria can be responsible for N_2O production during BNR (Kampschreur et al., 2009).

It is widely accepted that N_2O can be produced by ammonia oxidizing bacteria (AOB) via two main pathways (Kampschreur et al., 2009): i. the reduction of NO_2^- as terminal electron acceptor to N_2O (AOB denitrification) (Kim et al., 2010; Yu et al., 2010; Wrangle et al., 2001; Stuvan et al., 1992); ii. incomplete oxidation of hydroxylamine (NH_2OH) to NO_2^- (Law et al., 2012; Chandran et al., 2011). Furthermore, N_2O may be produced

as an intermediate of the incomplete heterotrophic denitrification (Lu and Chandran, 2010).

As it is generally recognized that the anoxic heterotrophic denitrification is the dominant process compared with aerobic denitrification and autotrophic denitrification, it is still a need to assess if this rank remains also for N_2O emission (Kampschreur et al., 2009). In the last years many efforts have been spent towards the understanding of the key mechanisms involved in N_2O production and emission (Kampschreur et al., 2009). As a consequence, several parameters that might favor N_2O production/emission have been identified: low dissolved oxygen concentrations, nitrite accumulation, dynamic conditions as well as low carbon-to-nitrogen (C/N) ratio values during denitrification. Moreover, the technical literature highlights that in processes aimed at the simultaneous nitrogen and phosphorous removal (SNPR), the role of polyphosphate accumulating organisms (PAOs) in the production of N_2O cannot be disregarded (among others, Zhou et al., 2012).

Furthermore, in a hybrid biological system (IFAS-system) where suspended as well as attached biomass is in function in the same reactor, denitrification in the biofilm even under aerobic reactor conditions, could contribute significantly to N_2O -production and emission.

In the last years, the hybrid systems have been proposed for SNPR. Hybrid systems maximize the nitrification by means of high solid retention time (SRT) of the biofilm, but having the potential of operating the suspended growth phase with a relatively short SRT. Moreover, in a hybrid system, the biofilm and the suspended biomass may function differently referring to either nitrogen or phosphorus removal. This aspect can be of importance with respect to N_2O emissions from SNPR in hybrid systems. Among the hybrid systems, the joint use of membrane bioreactors (MBRs) and moving bed biofilm reactors (MBBRs) in an IFAS-system, where the secondary is replaced by a membrane module, was recently proposed and referred to as moving bed membrane bioreactor (MB-MBR) (Di Trapani et al., 2014) or an IFAS-MBR. Up to now, only few studies (Lo et al., 2010) examined the relative effects of the biofilm and the suspended sludge on N and P removal efficiencies and N_2O emission in a hybrid SNPR system. Therefore, a better understanding of the mechanisms involved in N_2O production from hybrid systems aimed at nutrient removal is the goal of this study.

Bearing in mind such considerations, the aim of the present study was to investigate the N_2O emissions from a University of Cape Town IFAS-MBR (UCT-IFAS-MBR) pilot plant. The UCT-IFAS-MBR pilot plant consisted of one anaerobic, one anoxic and one aerobic compartments in series, according to the UCT scheme (Ekama et al., 1983). Particularly, the reactors were provided of specific funnel shaped covers that allowed to sample and quantify the gas flux stripped in each reactor head space.

2. Materials and methods

2.1. Pilot plant lay-out

The lay-out of the UCT-IFAS-MBR pilot plant is shown in Fig.1; it was operated for 51 days.

In details, the pilot plant consisted of anaerobic (volume: 62 L), anoxic (volume: 102 L) and aerobic (volume: 211 L) compartments (Cosenza et al., 2013). The solid-liquid separation phase was achieved by means of an ultrafiltration hollow fibre membrane module (PURON[®]). The membrane module was located inside a dedicated aerated compartment (referred to as the MBR tank, with a 36 L volume). An oxygen depletion reactor (ODR) allowed oxygen removal in the mixed liquor recycled from the MBR tank to the anoxic tank (Q_{RAS}). The

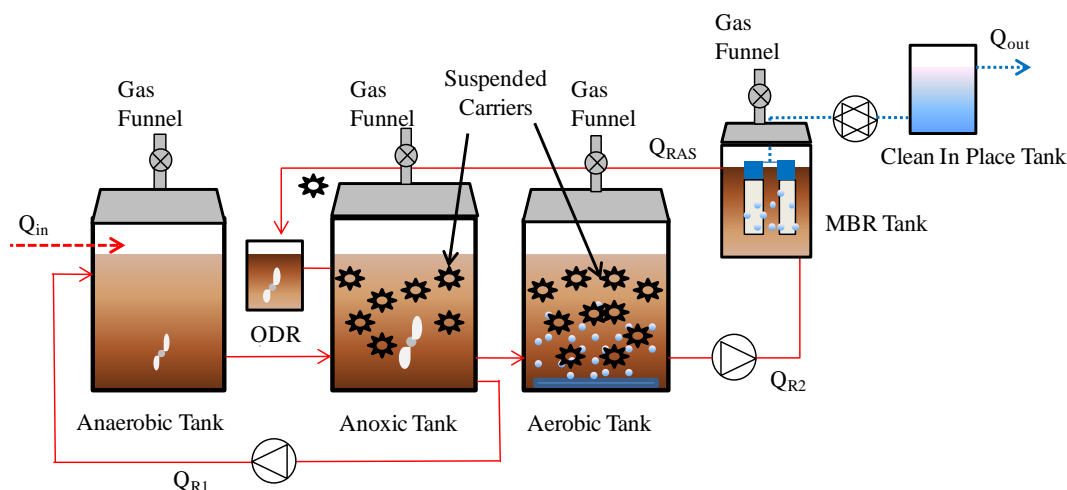


Figure 1. Lay-out of the UCT – IFAS-MBR pilot plant

membrane was periodically backwashed (every 9 min for a period of 1 min) by pumping a volume of permeate back through the membrane fibres from the Clean In Place (CIP) tank. The influent flow rate was set equal to 20 L h^{-1} (Q_{in}). During the pilot plant operation, a 20 L h^{-1} recycle flow (Q_{R1}) was continuously pumped from the anoxic to the aerobic tank. Furthermore, a recycle flow of 100 L h^{-1} mixed liquor (Q_{R2}) was pumped from the aerobic to the MBR tank. A net permeate flow rate of 20 L^{-1} was extracted (Q_{OUT}) through the membrane. Therefore, the recycled activated sludge (Q_{RAS}) from the MBR to the anoxic tank through the ODR tank was equal to 80 L h^{-1} . The anaerobic, anoxic, aerobic and MBR reactors were equipped with specific funnel shape covers that guaranteed gas accumulation in the headspace to perform the gas sampling.

Furthermore, the anoxic and aerobic compartments were filled with suspended carriers (Amitech s.r.l.) with a 15 and 40% filling fraction respectively, corresponding to a net surface area of 75 and $205 \text{ m}^2 \text{ m}^{-3}$, respectively.

2.2. Operative conditions and experimental performances

During the experimental campaign the pilot plant was operated with no sludge withdrawal.. As the report of the present paper deals with the pilot plant gas production, the mean values of operational parameters are only briefly summarized in Table 1.

Table 1. Mean values of operational parameters

COD_{in} [mg L^{-1}]	TN_{in} [mg L^{-1}]	$\text{PO}_4\text{-P}_{in}$ [mg L^{-1}]	$\text{TSS}_{anaerobic}$ [g L^{-1}]	TSS_{anoxic} [g L^{-1}]	$\text{TSS}_{aerobic}$ [g L^{-1}]	TSS_{MBR} [g L^{-1}]	VSS/TSS_{mean} -
577	60	9	1.96	3.83	3.97	4.75	0.86

On average the mean COD removal efficiency was high (>95%), the nitrification efficiency was almost complete (>95%), the denitrification efficiency was 62% and the phosphorus removal was 25%.

2.3. Gas sampling and measurements

The liquid and gaseous samples were withdrawn from the anaerobic, anoxic, aerobic and MBR tanks and analysed to determine the N₂O-N concentration. Furthermore, the N₂O-N fluxes (gN₂O-N m⁻² h⁻¹) from all the compartments were quantified by measuring the gas flow rates, Q_{GAS} (L min⁻¹).

2.3.1. Gas flux assessment

Text Gas flow rate, expressed as Q_{GAS} was measured in accordance to Equation 1.

$$Q_{GAS} = v_{GAS} \cdot A \quad [1]$$

where A represents the outlet section of the sampling funnel (m²) and V_{GAS} (m s⁻¹) is the gas velocity, measured by using an hot wire anemometer.

Thus, the gas flux was assessed by applying the Equation 2.

$$F_{GAS} = \rho \cdot C \cdot \frac{Q_{GAS}}{A} \quad [2]$$

where F_{GAS} represents the gas flux emitted from the sampled reactor (mgN₂O-N h⁻¹ m⁻²), ρ is the gas density at the recorded temperature (mol m⁻³), C is the measured gas concentration (mg L⁻¹), Q_{GAS} is the gas flow rate (m³ h⁻¹) and A represents the emitting surface of each sampled reactor (m²).

2.3.2. Gas phase sampling

Gas produced due to biological activities of biomass accumulated inside the head space of each reactor funnel and was collected by withdrawing samples (9 ml) by means of commercial syringes and thus transferred into glass vials where the vacuum was previously created. Samples from the anaerobic, anoxic, aerobic and MBR reactors were collected two times per week with tree replicates for each sampling section. Gas samples were analysed with GC equipped with ECD detector to assess the Nitrous Oxide concentration.

2.3.3. Dissolved phase sampling

The measure of gas dissolved in the liquid phase was conducted on the basis of the head space gas method derived from Kimochi et al. (1998). In detail, 70 mL of supernatant (after 5 min of centrifugation at 8000 rpm) were sealed into 125 mL glass bottles. To prevent any biological reaction, 1 mL of 2N H₂SO₄ was added. After 24 h of gentle stirring, the bottles were left for 1 h without moving.

Thereafter, the gas accumulated in the headspace of the bottles was collected similarly to the gas sampling procedure. Finally, by applying Henry's Law, the dissolved gas concentration at equilibrium with the headspace gas was calculated. Samples of liquid phase were collected from the anaerobic, anoxic, aerobic, MBR and ODR reactors two times per week with tree replicates for each sampling section; furthermore liquid samples of the MBR permeate were also collected and analysed in order to assess the N₂O concentration discharged with the pilot plant effluent.

2.3.4. N₂O emission factor and mass balance

For each compartment, the evaluation of the N₂O-N emission factors, expressed as the percentage of N₂O-N emitted compared to the inlet nitrogen loading rates, was conducted by means of the following Equation 3 derived by Tsuneda et al., 2005:

$$EF = \frac{\frac{N_2O - N_{Gas}}{HRT_{HS}} + \frac{N_2O - N_{Dissolved}}{HRT}}{\frac{TN_{IN}}{HRT}} \quad [3]$$

where EF represents the N₂O emission factor [%]; N₂O-N_{Gas} is the nitrous oxide concentration in the gas phase (mg N₂O-N L⁻¹), HRT_{HS} is the hydraulic retention time of the head space of the sampled reactor, assessed by taking into account the head space volume and the gas flow rate, (h); N₂O-N_{Dissolved} is the liquid phase gas concentration (mg N₂O-N L⁻¹); HRT is the hydraulic retention time of the pilot plant (h) and TN_{IN} is the total nitrogen concentration fed to the pilot plant (mgN L⁻¹).

Furthermore, in order to evaluate the gas production or consumption inside each reactor, the nitrous oxide mass balance was performed in accordance to Equation 4.

$$N_2O - N_{Dissolved,IN} - N_2O - N_{Dissolved,OUT} - N_2O - N_{Gas,OUT} = \pm N_2O - N_{p,c} \quad [4]$$

where N₂O-N_{Dissolved,IN} and N₂O-N_{Dissolved,OUT} represent the influent and effluent amount of dissolved nitrous oxide respectively (mg N₂O-N h⁻¹); N₂O-N_{Gas,OUT} is the effluent gaseous N₂O-N (mg N₂O-N h⁻¹) and N₂O-N_{p,c} (mg N₂O-N h⁻¹) represents the amount of N₂O-N produced (in case of negative sign, therefore consider only subscript “p”) or consumed (in case of positive sign, therefore consider only subscript “c”) inside the tank.

3. Results and discussion

The recorded gas phase concentrations are shown in Figure 2. The N₂O gas concentration remained quite constant during the experimental period except for in the anoxic reactor gas concentration varied considerably as compared to the others reactors. On the 25th experimental day, the gas concentration in the anoxic reactor started to increase progressively up to the maximum value of 210 µg N₂O-N L⁻¹ on the 32th experimental day. This result is likely due to an incomplete denitrification that occurred during those days, with nitrate concentration in the permeate flow ranging from 33.6 to 41 mg NO₃-N L⁻¹. This affected the gas production in the anoxic reactor, where denitrification takes place, in agreement with data in the literature where incomplete denitrification is identified as one of the causes that can lead to the N₂O production (Kampschreur et al., 2009). Several authors agree in identifying the anoxic reactor as the main N₂O producer (Otte et al., 1996; Kampschreur et al., 2009).

On average the average gas concentrations during the experimental period, measured in each reactor, were equal to 15.40 µg N₂O-N L⁻¹, 29.11 µg N₂O-N L⁻¹, 13.97 µg N₂O-N L⁻¹ and 12.50 µg N₂O-N L⁻¹ for anaerobic, anoxic, aerobic and MBR reactor respectively.

Based on the measured gas concentration, the flux emitted from each reactor was assessed, see Figure 3.

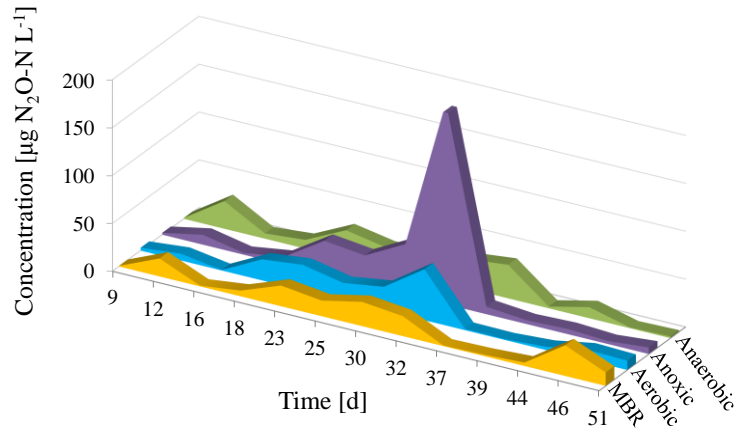


Figure 2. Gas phase concentrations

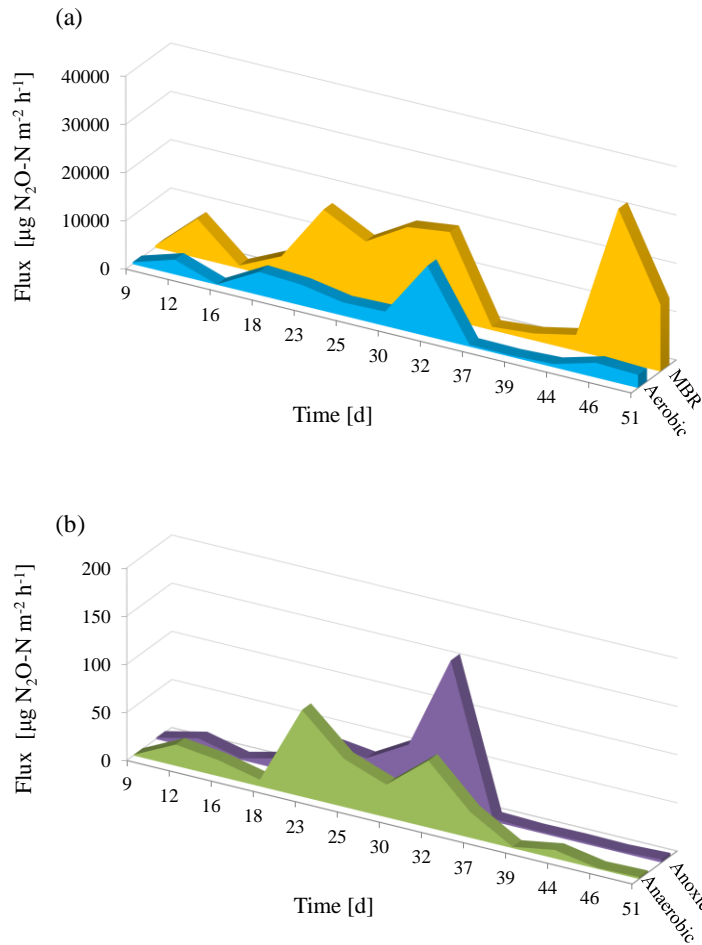


Figure 3. N_2O-N Flux emitted from aerated reactors (a) and not aerated reactors (b)

The results reported in Figure 3 allow analysis of the effect of the air supply to the N_2O emission as well as

the effect of the carriers. The flux measured in the aerated reactors (Figure 3a) was two orders of magnitude higher than the flux measured in the not aerated reactors (Figure 3b). The air supplied to the aerobic reactor (to guarantee the aerobic environment) and to the MBR reactor (in order to mitigate the membrane fouling) enhances the physical stripping of the gas from the liquid phase. The average fluxes measured in each reactor were found to be $25.39 \mu\text{g N}_2\text{O-N m}^{-2} \text{ h}^{-1}$, $25.01 \mu\text{g N}_2\text{O-N m}^{-2} \text{ h}^{-1}$, $3092 \mu\text{g N}_2\text{O-N m}^{-2} \text{ h}^{-1}$ and $9872 \mu\text{g N}_2\text{O-N m}^{-2} \text{ h}^{-1}$ for anaerobic, anoxic, aerobic and MBR reactor respectively.

The nitrous oxide flux emitted from the MBR reactor resulted on average three time higher than the flux emitted in the aerobic reactor. This result is emphasized since the scientific literature consider the nitrogen transformation process as the main source of nitrous oxide (Kampschreur et al., 2009; Law et al., 2012; Zhao et al., 2014) while in the MBR reactor, due to the low HRT (0.36 h), very little biological activity is expected to occur. The presence in the aerobic reactor of both biomasses, suspended and attached, may have enhanced the gas production both contributing to the flux emission. The reason for the huge emission from the MBR reactor is likely due to the high value of Q_{R2} (100 L h^{-1}) that is constantly pumped from aerobic to MBR reactor and thus acting as a recycle of dissolved nitrous oxide produced in the aerobic reactor. Dissolved nitrous oxide conveyed to the MBR reactor pass into the gas phase by stripping, due to the intensive aeration provided for membrane fouling mitigation, and hence contributing to the large flux emitted from MBR.

The circumstance that the physical effect of the aeration significantly affect the gas concentration is also noticeable from the dissolved gas concentrations measured in the reactors of the pilot plant (see Figure 4).

The results reported in Figure 4 provide an opposite situation for the dissolved phase as compared to the gas phase and the emitted flux of nitrous oxide. Due to the absence of the air supply, the measured concentration in the non aerated reactors (Figure 4a) resulted in an order of magnitude higher concentration than the one measured in the aerated reactors and in the permeate flow (Figure 4b). The average concentrations measured in each reactor and in the permeate flow were $100 \mu\text{g N}_2\text{O-N L}^{-1}$, $50.30 \mu\text{g N}_2\text{O-N L}^{-1}$, $12.25 \mu\text{g N}_2\text{O-N L}^{-1}$, $13.12 \mu\text{g N}_2\text{O-N L}^{-1}$ and $14.63 \mu\text{g N}_2\text{O-N L}^{-1}$ for the anaerobic, anoxic, aerobic and MBR reactor and for the permeate flow respectively. The circumstance that the highest dissolved concentration were retrieved in the anaerobic reactor is likely ascribable to the low biological phosphorus removal efficiency achieved during the experimentation (25% on average). Indeed if anoxic conditions can prevail inside the anaerobic reactor, the denitrifying phosphate accumulating organisms (DPAOs) can denitrify during a denitrifying P removal process leading to a low P removal efficiency. Several studies reported that N_2O rather than N_2 was the major denitrification product when DPAOs used poly- β -hydroxyalkanoates (PHA) as a carbon source for denitrification during denitrifying P removal process (Lemaire et al., 2006; Jia et al., 2012; Wang et al., 2015). In such a context, N_2O production can be expected to be significantly influenced as the amount of anaerobic PHA synthesis is affected by influent quality variation. Hence N_2O generation during denitrifying P removal processes should also be noticed (Wang et al., 2015).

With reference to the anoxic reactor the measured N_2O concentration appears consistent with previous studies that identified the anoxic reactor as one of the major contributors to $\text{N}_2\text{O-N}$ production (Otte et al., 1996; Kampschreur et al., 2009).

On the contrary the results reported in Figure 4b confirm that the stripping effect exerted by the air supply on the aerobic and MBR reactor is very important with respect to the flux of $\text{N}_2\text{O-N}$ emitted. The permeate flow

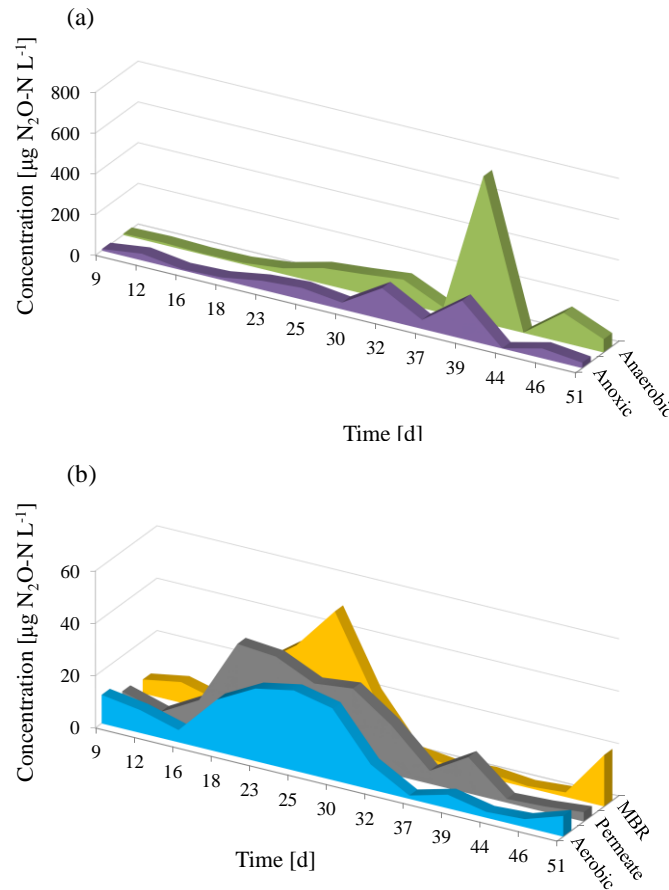


Figure 4. Dissolved N_2O-N concentrations measured inside the anaerobic and anoxic reactors (a) and inside the aerobic and MBR reactors and in the permeate flow (b)

concentration were comparable to dissolved concentrations measured in the other aerated reactor and thus not negligible.

In order to better quantify the influence exerted by each reactor on the N_2O emission, the emission factors have been assessed and the results are shown in Figure 5.

Results reported in Figure 5 highlight that emission factors of each compartment, expressed as a percentage of the total nitrogen load of the plant, varied moderately during the experimentation, with a maximum value close to 1%. However, Figure 5a demonstrates that the main contribution in N_2O emission derives from the aerated reactors while the contribution of the anaerobic reactor as well as of the anoxic reactor is negligible. This observation is confirmed by data reported in Figure 5b where the average contribution of each reactor is depicted. The MBR contribution represented on average 76.13% of the total emission, the aerobic reactor contributed on average with 21.38% of the total, while the sum of anaerobic and anoxic reactors contributed with a total of 2.49%. This result is consistent with the fact that the results reported in Figure 3 and 4 demonstrated that a significant fraction of N_2O produced in the reactors without air supply is further conveyed and thus stripped in the aerated reactors.

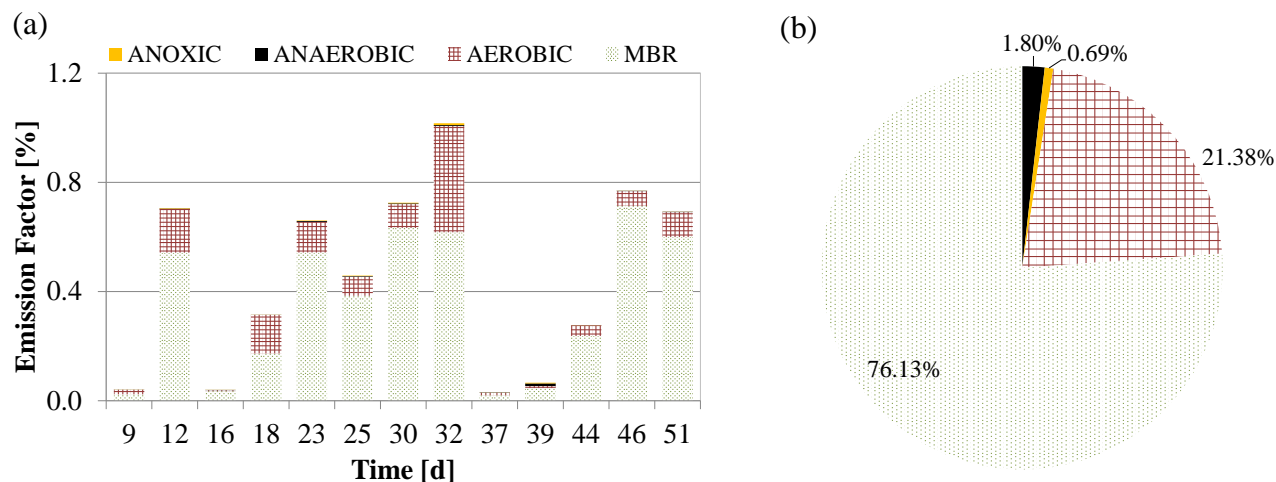


Figure 5. *N₂O-N emission factors (a) and average percentage contribution of each tank (b)*

As the denitrification is considered to be one of the dominant factors in N₂O production, the influence exerted by nitrate concentration in the nitrous oxide production is reported in Figure 6.

The data shown in Figure 6 confirm the key role of the anoxic reactor in the N₂O production. Indeed, the nitrate concentration in the anoxic reactor significantly influences the gas concentration as well as the flux (Figure 6a and b). As the nitrate concentration increases, both gas concentration and gas flux increase logarithmically. Furthermore, the N₂O gaseous concentration in the anoxic reactor is strongly related to the nitrate concentration in the permeate flow (Figure 6c).

Nitrous oxide represents an intermediate product of denitrification and thus of incomplete denitrification (Kampschreur et al., 2009). Furthermore, in the anoxic reactor the dissolved nitrate should be removed, and if biological denitrification takes place, limited N₂O production should result. The logical link between the latter observation and the presence of nitrate in the effluent is the accordance with the relation between gas concentration in the anoxic reactor and nitrate concentration in the effluent. Indeed, the occurrence of high N₂O production in the anoxic reactor should represent a limitation of the denitrification phenomenon, thus leading to the presence of nitrates in the effluent flow rate.

In order to investigate the specific production/consumption of each reactor, the N₂O mass balance analysis over the reactors was carried out and shown in Figure 7.

The data presented in Figure 7 a, b, c, d and e are consistent with results previously discussed. Indeed, the mass balance highlights that in the anaerobic and anoxic reactor a net N₂O production took place during the experimentation. This is in accordance with the higher N₂O dissolved concentration measured in the non-aerated reactors. On the contrary, in the aerobic reactor the mass balance outlined a constant consumption of nitrous oxide (up to almost 15 mg N₂O h⁻¹), due to the high amount of gas stripped. In the MBR reactor, a clear trend of the mass balance result was not noticeable. This confirms that the high nitrous oxide flux emitted from the MBR reactor was due to a physical stripping of the gas produced in other reactors of the pilot plant and conveyed in the MBR with the Q_{R2}.

However, the mass balance demonstrates, with reference to N₂O production (Figure 7f), that the anaerobic and

anoxic reactors represent the main source of N_2O production (85 % of the overall production). Thus, the results of this paper indicate that the main pathways involved in the nitrous oxide production result from the heterotrophic denitrification, that normally occurs in the anoxic reactor, and the denitrifying P removal process, that is promoted by DPAOs, in the anaerobic reactor.

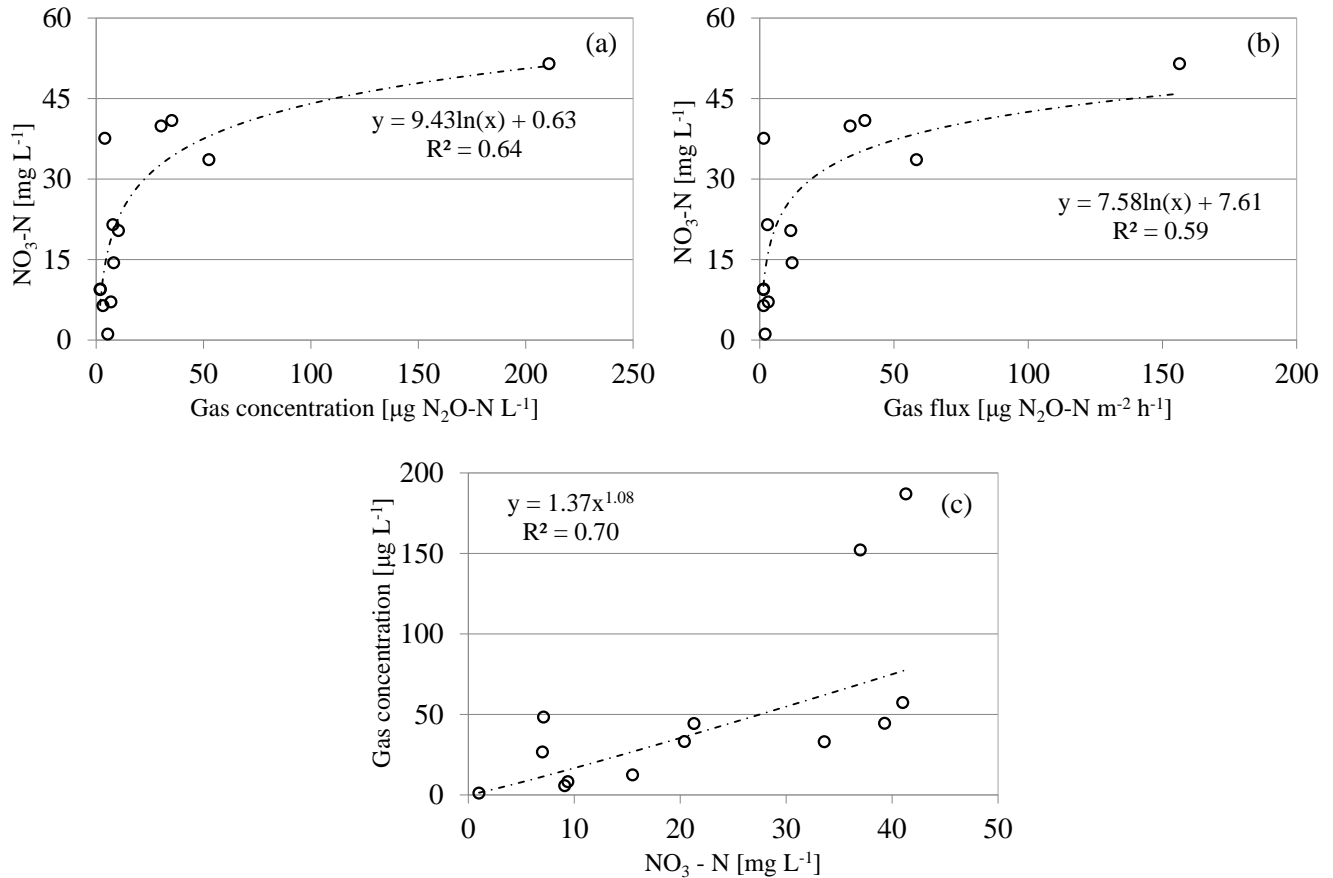


Figure 6. Correlation between $N_2O\text{-N}$ gaseous concentration and nitrate concentration in the anoxic reactor (a), nitrate concentration and $N_2O\text{-N}$ flux in the anoxic reactor (b), $N_2O\text{-N}$ gaseous concentration in the anoxic reactor and nitrate concentration in the permeate flow (c)

4. Conclusions

This paper reports the results of experiments carried out in a MBBR-based IFAS MBR pilot plant operated according to the UCT design. The goal of the experiments was to investigate the nitrous oxide production.

These results indicate that the anaerobic and the anoxic reactors represent the main source of nitrous oxide production. The physical effect of aeration that caused N_2O stripping was noticed in the aerobic as well as in the MBR reactor. The N_2O flux emitted from the aerated reactors was up to two order of magnitude higher than that of the not aerated (anaerobic and anoxic) reactors. Furthermore, due to the absence of the aeration, the concentration of N_2O in the non aerated reactors was an order of magnitude higher than the concentration in the aerated reactors and in the permeate flow. The N_2O concentration measured in the permeate flow was

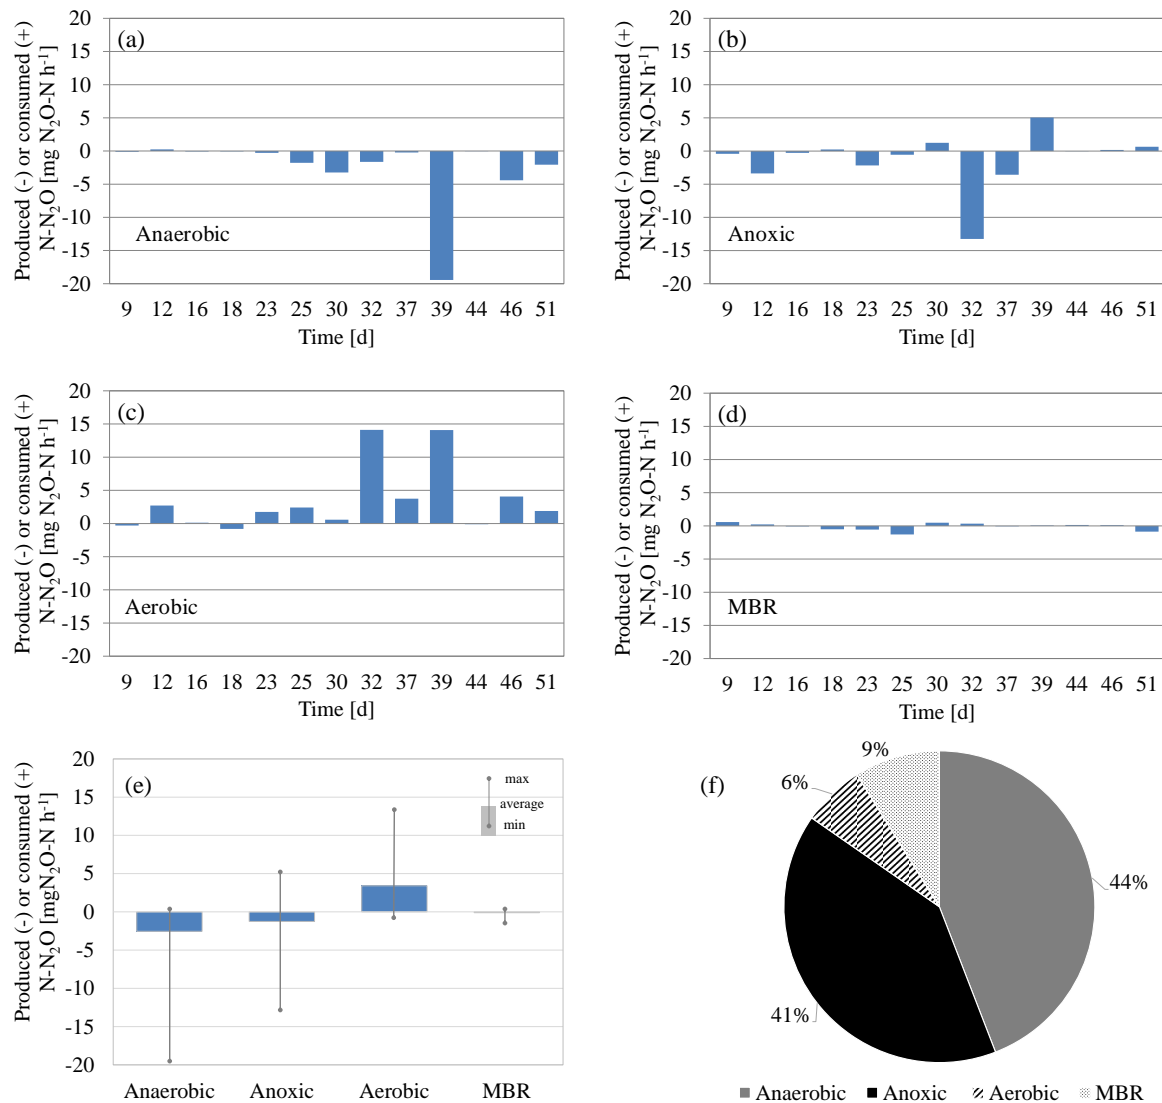


Figure 7. N₂O-N mass balance for anaerobic (a), anoxic (b), aerobic (c) and MBR reactors (d); maximum, minimum and mean value of N₂O-N production/consumption over the reactors (e); mean percentage of N₂O-N production over the reactors (f)

comparable to the concentrations measured in the aerobic and MBR reactors and thus not negligible. The emission factor assessment showed that only around 1% of the influent nitrogen was emitted as N₂O from the whole pilot plant.

By taking into account the biological parameters of the pilot plant, the nitrate concentration within the anoxic reactor turned out to be a key factor in the influence of the N₂O production. The experiments demonstrate that further studies are required in order to better understand the influence of the operational parameters, as well as of the biomass feature, in the N₂O production. Indeed, in the reported experiments a net contribution of the attached biomass or of the suspended biomass was not noticeable.

Acknowledgements

This work forms part of a research project supported by grant of the Italian Ministry of Education, University and Research (MIUR) through the Research project of national interest PRIN2012 (D.M. 28 dicembre 2012 n. 957/Ric – Prot. 2012PTZAMC) entitled “Energy consumption and GreenHouse Gas (GHG) emissions in the wastewater treatment plants: a decision support system for planning and management – <http://ghgfromwwtp.unipa.it>” in which the first author of this paper is the Principal Investigator.

References:

- [1] Chandran, K., Stein, L.Y., Klotz, M.G., van Loosdrecht, M.C.M., 2011. Nitrous oxide production by lithotrophic ammonia oxidizing bacteria and implications for engineered nitrogen-removal systems. *Biochem. Soc. Trans.* 39, 1832-1837.
- [2] Cosenza, A., Di Bella, G., Mannina, G., Torregrossa, M., Viviani, G. 2013. Biological Nutrient Removal and Fouling Phenomena in a University of Cape Town Membrane Bioreactor Treating High Nitrogen Loads . *J. Environ. Eng.* 139, 773-780.
- [3] Di Trapani, D., Di Bella, G., Mannina, G., Torregrossa, M., Viviani, G., 2014. Comparison between moving bed-membrane bioreactor (MB-MBR) and membrane bioreactor (MBR) systems: Influence of wastewater salinity variation. *Bioresour. Technol.* 162, 60–69.
- [4] Ekama, G.A., Siebritz, I.P., Marais, G.R., 1983. Considerations in the process design of nutrient removal activated sludge processes. *Wat. Sci. Tech.* 15 (3-4), 283 – 318.
- [5] IPCC, 2007. Changes in atmospheric constituents and in radiative forcing. In: Solomon, S. et al. (Eds.), *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change.* Cambridge University Press, Cambridge, pp. 114–143.
- [6] Jia, W.L., Zhang, J., Xie, H.J., Yan, Y.J., Wang, J.H., Zhao, Y.X., Xu, X.L., 2012. Effect of PHB and oxygen uptake rate on nitrous oxide emission during simultaneous nitrification denitrification process. *Bioresour. Technol.* 113, 232–238.
- [7] Kampschreur, M.J., Temmink, H., Kleerebezem, R., Jetten, M.S.M., van Loosdrecht, M.C.M., 2009. Nitrous oxide emission during wastewater treatment. *Water Res.* 43, 4093–4103.
- [8] Kim, S.W., Miyahara, M., Fushinobu, S., Wakagi, T., Shoun, H., 2010. Nitrous oxide emission from nitrifying activated sludge dependent on denitrification by ammonia oxidizing bacteria. *Bioresour. Technol.* 101, 3958-3963.
- [9] Kimochi, Y., Inamori, Y., Mizuochi, M., Xu, K.-Q., and Matsumura, M., 1998. Nitrogen removal and N₂O emission in a full-scale domestic wastewater treatment plant with intermittent aeration. *J. Ferment. Bioeng.* 86, 202–206.
- [10] Law, Y., Ni, B.J., Lant, P., Yuan, Z., 2012. N₂O production rate of an enriched ammonia-oxidising bacteria culture exponentially correlates to its ammonia oxidation rate. *Water Res.* 46, 3409-3419.

- [11] Lemaire, R., Meyer, R., Taske, A., Crocetti, G.R., Keller, J., Yuan, Z.G., 2006. Identifying causes for N₂O accumulation in a lab-scale sequencing batch reactor performing simultaneous nitrification, denitrification and phosphorus removal. *J. Biotechnol.* 122, 62–72.
- [12] Lo, I.W., Lo, K.W., Mavinic, D.S., Shiskowski, D., Ramey, W., 2010. Contributions of biofilm and suspended sludge to nitrogen transformation and nitrous oxide emission in hybrid sequencing batch system. *Journal of Environmental Sciences*, 22(7) 953–960.
- [13] Lu, H., Chandran, K., 2010. Factors promoting emissions of nitrous oxide and nitric oxide from denitrifying sequencing batch reactors operated with methanol and ethanol as electron donors. *Biotechnology and Bioengineering* 106 (3), 390-398.
- [14] Mannina G., Ekama, G., Caniani, D., Cosenza, A., Esposito, G., Gori, R., Garrido-Baserba, M., Rosso, D., Olsson, G. 2016. Greenhouse gases from wastewater treatment — A review of modelling tools. *Science of The Total Environment*, 551–552, 254-270.
- [15] Otte, S., Grobben, N.G., Robertson, L.A., Jetten, M.S.M., Kuenen, J. G., 1996. Nitrous oxide production by *Alcaligenes faecalis* under transient and dynamic aerobic and anaerobic conditions. *Applied and Environmental Microbiology* 62 (7), 2421–2426.
- [16] Stuvén, R., Vollmer, M., Bock, E., 1992. The impact of organic matter on nitric oxide formation by *Nitrosomonas europaea*. *Archives of Microbiology* 158 (6), 439-443.
- [17] Tsuneda, S., Mikami, M. and Kimochi, Y., 2005. Effect of salinity on nitrous oxide emission in the biological nitrogen removal process for industrial wastewater, *J. Hazard Mater.* 119, 93–98.
- [18] Wang, Z., Meng, Y., Fan, T., Du, Y., Tang, J., Fan, S., 2015. Phosphorus removal and N₂O production in anaerobic/anoxic denitrifying phosphorus removal process: Long-term impact of influent phosphorus concentration. *Bioresource Technology* 179 (2015) 585–594
- [19] Wrage, N., Velthof, G.L., van Beusichem, M.L., Oenema, O., 2001. Role of nitrifier denitrification in the production of nitrous oxide. *Soil Biology and Biochemistry* 33 (12-13), 1723-1732.
- [20] Yu, R., Kampschreur, M.J., Loosdrecht, M.C.M., Chandran, K., 2010. Mechanisms and specific directionality of autotrophic nitrous oxide and nitric oxide generation during transient anoxia. *Environ. Sci. Technol.* 44, 1313-1319.
- [21] Zhao, W., Wang, Y., Lin, X., Zhou, D., Pan, M., Yang, J., 2014. Identification of the salinity effect on N₂O production pathway during nitrification: Using stepwise inhibition and 15N isotope labeling methods. *Chem. Eng. J.* 253, 418–426.
- [22] Zhou, Y., Lim, M., Harjono, S., Ng, W.J., 2012. Nitrous oxide emission by denitrifying phosphorus removal culture using polyhydroxyalkanoates as carbon source. *J. Environ. Sci.* 24, 1616–1623.