

# Portable central baffle flume

Mohammad Bijankhan,<sup>1</sup> Ali Teymourkhani,<sup>1</sup> Vito Ferro<sup>2</sup>

<sup>1</sup>Department of Water Engineering, Imam Khomeini International University, Qazvin, Iran; <sup>2</sup>Department of Agricultural, Food and Forest Sciences, University of Palermo, Palermo, Italy

## Abstract

This paper investigated the hydraulic characteristics of the triangular central baffle (TCB) flume. Laboratory tests were carried out to determine the flume dimensions. The field applicability of the proposed portable device was examined by on-farm installation. According to the laboratory tests, when the contraction ratio,  $r$ , was less than 0.39, the flow capacity was not affected by the ratio between the flume's floor height and the throat width. The laboratory analysis also showed that there was no significant effect of installing an entrance ramp on the stage-discharge relationship for  $r \leq 0.39$ , while the entrance ramp increased the discharge capacity for  $r > 0.39$ . The stage-discharge curve obtained based on the laboratory tests was verified using field data. The results revealed that the proposed portable flume could be used accurately to determine the flow through an unlined ditch. Practical suggestions were proposed to determine the distinguishing condition curve.

Correspondence: Vito Ferro, Department of Agricultural, Food and Forest Sciences, University of Palermo, Viale delle Scienze, 90128 Palermo, Italy. E-mail: vito.ferro@unipa.it

Key words: Triangular central baffle flume; stage-discharge formula; Buckingham's theorem; incomplete self-similarity; submergence threshold.

Contributions: MB, conceptualisation, methodology, laboratory and field tests, data curation, writing-original draft preparation; AT, laboratory and field tests, data curation; VF, conceptualisation, methodology, writing-original draft preparation.

Received for publication: 5 January 2022.  
Accepted for publication: 21 April 2022.

© Copyright: the Author(s), 2022

Licensee PAGEPress, Italy

Journal of Agricultural Engineering 2022; LIII:1339

doi:10.4081/jae.2022.1339

This article is distributed under the terms of the Creative Commons Attribution Noncommercial License (by-nc 4.0) which permits any non-commercial use, distribution, and reproduction in any medium, provided the original author(s) and source are credited.

Publisher's note: All claims expressed in this article are solely those of the authors and do not necessarily represent those of their affiliated organizations, or those of the publisher, the editors and the reviewers. Any product that may be evaluated in this article or claim that may be made by its manufacturer is not guaranteed or endorsed by the publisher.

## Introduction

A central baffle flume consisting of an obstacle inserted in the channel axis is a measuring structure whose design criteria are developing. For example, taking a circular cone as the central baffle, Hager (1985) proposed a stage-discharge formula for a trapezoidal flume. A circular mobile flume consisting of two pieces of pipes, one installed vertically through another, is a kind of central baffle flume (Hager, 1989; Samani *et al.*, 1991; Kolavani *et al.*, 2019).

Applying the dimensional analysis and the self-similarity theory and using the experimental data provided by Peruginelli and Bonacci (1995), Ferro (2016) proposed the following stage-discharge formula:

$$\frac{Q^{2/3}}{B_c^{2/3} g^{1/3}} = a \left( \frac{h}{B_c} \right)^n \quad (1)$$

where,  $Q$  is discharge,  $B_c (=B-b)$  is throat width,  $B$  is channel width,  $b$  is baffle width,  $h$  is upstream flow depth,  $g$  is the acceleration due to gravity, and  $a$  and  $n$  are coefficients to be estimated by using experimental data. Equation (1) is applicable for a central baffle installed in a rectangular channel cross-section.

Samani (2017) investigated the field application of three simple flow measuring devices and proposed the application of mobile flumes for circular, trapezoidal, and rectangular channel cross-sections. A circular pipe installed vertically was considered the central baffle for circular and trapezoidal flumes, while for the rectangular case, he proposed using two half-pipes glued at the channel walls.

Ferro (2018), using the field measurements carried out by Samani (2017), tested the applicability of the proposed theoretical stage-discharge relationships for the case of both a flume with two semi-cylindrical glued at the channel walls and a circular flume in which a column pipe is installed at the middle of the main pipe.

Lotfi Kolavani *et al.* (2019) investigated the flow through a central baffle flume to quantify the impact of the throat length,  $L$ , and apex angle,  $\alpha$ , on the stage-discharge relationship. They proposed a central baffle flume with an entrance apex angle of  $75^\circ$  and no guide wall installation, *i.e.*,  $L=0$ , to minimise the construction costs.

Bijankhan and Ferro (2019) investigated the flow through a triangular central baffle (TCB) flume and, using the dimensional analysis and self-similarity theory, proposed the following stage-discharge formula:

$$\frac{Q}{B_c^{5/2} g^{1/2}} = 0.6925 \left( \frac{h}{B_c} \right)^{1.5734} \quad (2)$$

Equation (2) is applicable for a triangular baffle with an apex angle of  $75^\circ$  and  $0.17 \leq B_c/B \leq 0.76$  (Bijankhan and Ferro, 2019).

Kapoor *et al.* (2019) developed the design criteria for a mobile conical central baffle flume. A cone-shaped structure like the central baffle has the advantage of measuring a wider range of flow rates and being more stable against the water current.

The central baffle flume concept could be used for developing a simple portable flume. The structural sketch of the portable triangular central baffle (TCB) flume was proposed in this study. The TCB flume's structural shape led to evaluating the effects of the floor height,  $p$ , and an entrance ramp on the stage-discharge relationship. To this end, different combinations of floor height and entrance ramp dimensions were fabricated, and their effects were evaluated on the rating curves. Then this information was used to finalise the dimensions of a simple portable flume and the associated stage-discharge formula. Field measurements indicated that the stage-discharge formula developed based on laboratory data could be used accurately to determine the flow rate through the portable TCB flume.

## Materials and methods

### Laboratory tests

#### Structural shape of the portable triangular central baffle

Figure 1A shows the structural shape of the portable TCB flume proposed in this study. The proposed flume is used for on-farm applications and unlined ditches. As shown, the triangular central baffle was located on a flume floor. When installing the flume, it should be pushed into the soil until the flume floor is levelled with the canal bed. This would ensure stability and no leak-

age issues. However, in coarse grain size soils or rocky beds, it may not be possible to push it completely into the soil, and therefore the flume floor height might act as an entrance sill whose effect should be determined. The proposed device is a portable TCB, and it is not aimed to recommend a central baffle flume installed on a sill. Sill condition is an exceptional condition that may only occur when the device cannot be installed correctly.

A triangular central baffle of the apex angle of  $75^\circ$  was located on a flume floor of 0.4 m in width and 0.5 m in length. Guide walls of the given dimensions, as shown in Figure 1B, were proposed to make a transition from the width of 0.4 m to 0.5 m. Figure 1C indicates the portable TCB flume inserted in the experimental channel to obtain the associated stage-discharge curve. The experiments were conducted in a 0.5 m wide, 0.6 m high, and 12 m long Plexiglas flume located at the hydraulic laboratory of the water engineering Department, Imam Khomeini International University (IKIU), Qazvin, Iran.

#### Floor height and entrance ramp

As shown in Figure 2, the triangular central baffles of different widths were inserted into the experimental channel to investigate the effects of the floor height and an entrance ramp. To this end, the floor heights of  $\rho=0$ ,  $\rho=10$  (it was 10.3 in some cases), and  $\rho=15$  cm were tested (Table 1). Taking entrance ramp slopes (Figure 2) of  $\beta=0$ , 12, and 45 degrees with  $\rho=11$  cm, the role of  $\beta$  was investigated for different central baffle widths (Table 2).

The tests were carried out in a steady-state flow condition. A magnetic flow meter measured the flow rate with an accuracy of  $\pm 0.5\%$  of the full scale. Point gauges were used to record the flow depths of both upstream and downstream flume sections. The upstream flow level was recorded at the channel centreline and from the floor height. The swelling effect was marginal due to the triangular shape of the central baffle. However, the upstream flow

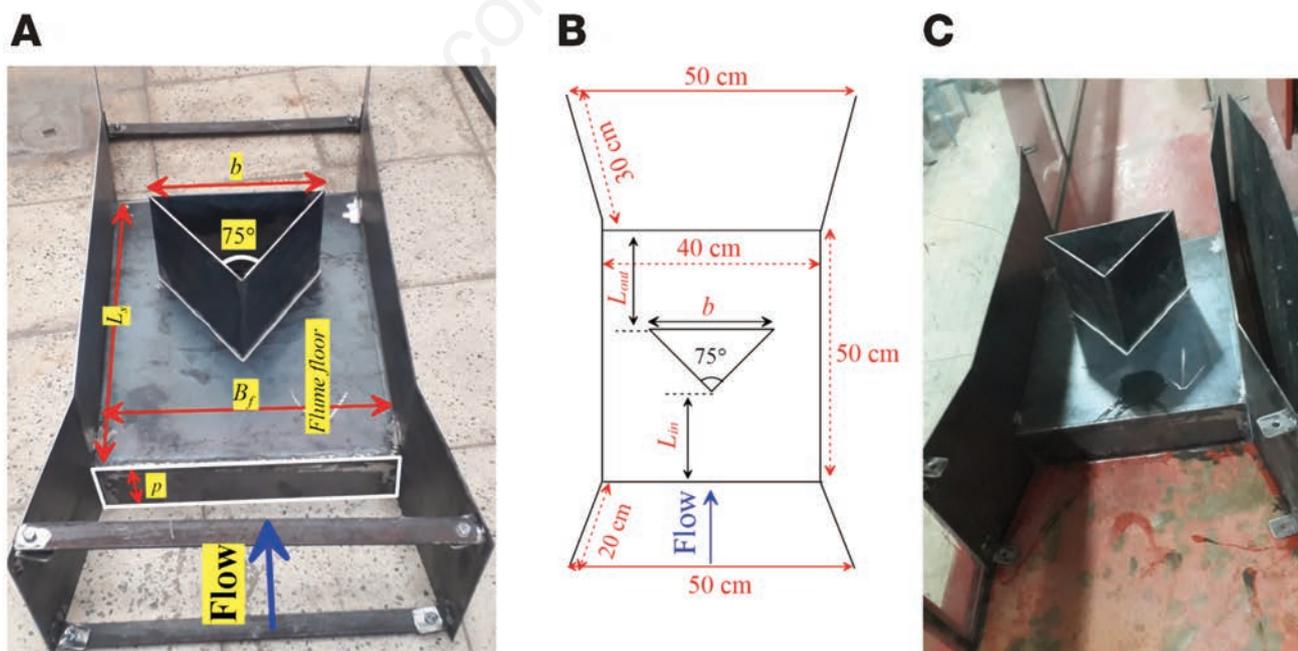


Figure 1. Portable triangular central baffle (TCB) flume for on-farm use: A) dimensions and structural shape; B) schematic view; C) Portable TCB flume inserted into the experimental channel (the total TCB flume height is 0.3 m and  $L_{in}=L_{out}$ ).

depth was recorded at 5 cm upstream of the central baffle apex. The tailwater flow depth was measured from the channel bed and at the channel centerline. No water level fluctuation was observed at the upstream pool. Note that all experimental runs were carried out with the TCB flume placed in a horizontal channel.

Finally, the distinguishing condition curve representing the maximum tailwater depth for a free flow condition (submergence threshold) was formulated using the experimental data of different floor heights, entrance ramp slopes, and  $B_0/B$  values (Table 3).

A sill length  $L_s$  equal to 0.5 m was used in all experimental runs. As proposed by Lotfi Kolavani *et al.* (2019), a triangular central baffle with an entrance apex angle of  $75^\circ$  and installed at the sill centre was considered in this study. Free flow condition was considered in all experimental runs.

### Testing the proposed portable flume

The portable flume of two central baffles with the widths of  $b=0.244$  and  $0.28$  m ( $r=0.39$  and  $0.3$ ) was tested. The flume was installed into the channel (Figure 1C), and the associated stage-discharge formula was obtained.

The upstream flow depth was recorded at 5 cm upstream of the central baffle apex. Tailwater depth was controlled using a tailgate installed at the channel end. The tailgate was fully open to ensure a free flow condition downstream of the portable central baffle structure. To achieve the submergence threshold, the tailgate was closed so that the upstream flow depth started increasing. Therefore, an upstream water level increase of 1-2 mm was considered the submergence threshold condition.

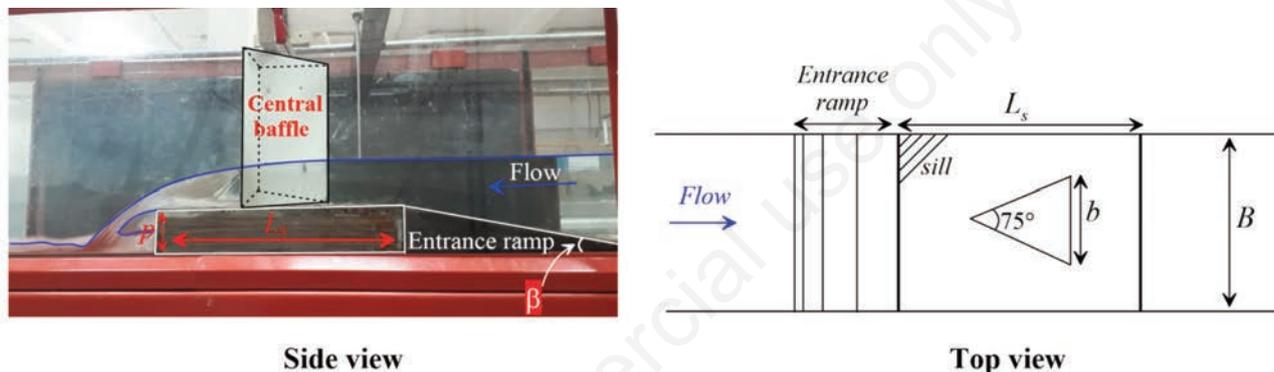


Figure 2. Triangular central baffle installed at the experimental flume (channel test).

Table 1. Experimental data ranges to investigate the floor height effect on the stage-discharge curve.

Floor height, $p$ (cm)	$B_0/B$	$Q$ (l/s)	$h$ (cm)
0	0.17, 0.39, 0.56, 0.76	3.5-45.65	2.9-29
10 and 10.3	0.17, 0.39, 0.56, 0.76	1.23-46.49	2.7-26.3
15	0.17, 0.56, 0.76	1.41-47.53	2-22.3

Table 2. Experimental data ranges to investigate the entrance ramp slope on the stage-discharge curve.

Entrance ramp slope (degree)	$B_0/B$	$Q$ (l/s)	$h$ (cm)
0	0.17, 0.39, 0.56, 0.76	3.14-32.39	3.6-26.3
11.3	0.17, 0.39, 0.59	3.44-40	3.5-30.4
45	0.17, 0.39, 0.59	5.28-34.72	4.7-27.5

Table 3. Experimental data ranges for investigating the distinguishing condition curve.

Floor height, $p$ (cm)	Entrance ramp slope (degree)	$B_0/B$	$Q$ (l/s)	$h$ (cm)	$h_{th}$ (cm)
0	0	0.17, 0.39, 0.56, 0.76	0.85-45.65	1.4-29	1.4-15.1
10 (or 10.3)	0	0.17, 0.39, 0.56, 0.76	3.14-32.39	3.9-26.6	12.4-20.8
11	0, 11.3, 45	0.17, 0.39, 0.56, 0.76	3.14-40	3.5-34	12.5-22.8
15	0	0.17, 0.76	1.83-12.42	2-14.9	16.6-21.2

### Field testing of the portable triangular central baffle flume

Field measurements were performed to assess the performance of the proposed portable TCB flume. The tests were performed in the research farm of the Water Engineering Department at Imam Khomeini International University, IKIU, Qazvin, Iran.

A portable flume with  $b=24.4$  cm ( $L_{in}=L_{out}=17$  cm) was installed at the ditch entrance supplied by an old Qanat, a system for transporting water from an aquifer or water well to the surface used in Iran, TCB flume was placed in the ditch horizontally. It was pushed into the soil to level the ditch bed and flume floor (Figure 3A). In such a condition, the flume was stable, and the flume leakage was minimised. In the downstream section, the soil bed was slightly deeper to ensure a free overfall and a free flow condition, as shown in Figure 3B and C. The flow rate was determined by measuring the required time to fill a 32 L reservoir. The upstream flow depth was measured using a ruler at 5 cm upstream of the central baffle apex (Figure 3C). Finally, the associated laboratory-derived rating curve of the portable device was compared with the field measurements.

#### Dimensional analysis

The free flow hydraulic of the central baffle flume with a floor height of  $p$ , equipped with an entrance ramp having a slope of  $\tan \beta$ , could be expressed by the following functional relationship:

$$\varphi(h, Q, B_c, B, p, \tan \beta, g, \rho, \mu) = 0 \quad (4)$$

where  $\varphi$  is a functional symbol,  $h$  is the upstream flow depth measured at 5 cm far from the upstream face of the central baffle,  $Q$  is discharge,  $B_c=B-b$  is the throat width,  $B$  is the approaching channel width,  $g$  is the acceleration due to gravity,  $\rho$  is water density and  $\mu$  is the water viscosity.

Taking  $B_c$ ,  $\mu$ , and  $g$ , as reference variables and applying Buckingham's theorem of dimensional analysis, the following dimensionless groups are obtained:

$$\Pi_1 = \frac{Q}{B_c^{5/2} g^{1/2}} \quad (4a)$$

$$\Pi_2 = \frac{B_c}{B} = r \quad (4b)$$

$$\Pi_3 = \frac{h}{B_c} \quad (4c)$$

$$\Pi_4 = \frac{p}{B_c} \quad (4d)$$

$$\Pi_5 = \tan \beta \quad (4e)$$

$$\Pi_6 = \frac{\mu}{B_c^{3/2} g^{1/2} \rho} \quad (4f)$$

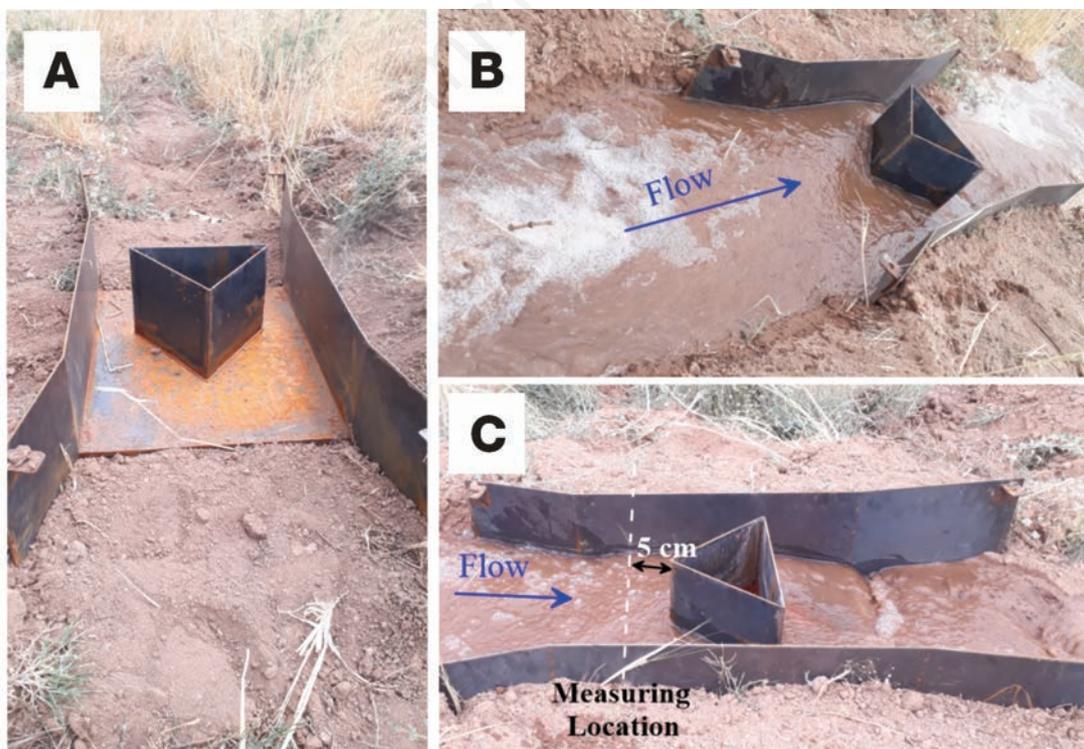


Figure 3. Portable triangular central baffle (TCB) flume: A) installation condition; B) flow through the measuring flume; C) reading the upstream flow depth.

Rearranging Eq. (4f), the following equation is obtained:

$$\Pi_{6,1,2} = \frac{\Pi_1 \Pi_2}{\Pi_6} = \frac{B_c^{3/2} g^{1/2} \rho}{\mu} \frac{Q}{B_c^{5/2} g^{1/2} B} \frac{B_c}{B} = \frac{\rho Q}{\mu B} = \text{Re} \quad (4g)$$

In which Re is the Reynolds number.

Taking  $\Pi_1$  as the dependent dimensionless group, the dimensionless form of Eq. (3) is the following:

$$\frac{Q}{B_c^{5/2} g^{1/2}} = f\left(\frac{h}{B_c}, \frac{p}{B_c}, r, \tan \beta, \text{Re}\right) \quad (5)$$

where  $f$  is a functional symbol.

For specific values of  $p/B_c$ ,  $r$ , and  $\tan \beta$ , when  $h/B_c \rightarrow 0$  then  $Q/[B_c^{5/2} g^{1/2}] \rightarrow 0$  and when  $h/B_c \rightarrow \infty$  then  $Q/[B_c^{5/2} g^{1/2}] \rightarrow \infty$ . Therefore, according to the incomplete self-similarity (ISS) theory (Barenblatt, 1979, 1987), the group  $h/B_c$  can be extracted as a power type expression:

$$\frac{Q}{B_c^{5/2} g^{1/2}} = \left(\frac{h}{B_c}\right)^n f_1\left(\frac{p}{B_c}, r, \tan \beta, \text{Re}\right) \quad (6)$$

where  $n$  is a numerical constant to be obtained by experimental data and  $f_1$  is a functional symbol. According to the experimental data of this study, the Reynolds number is in the range of  $2.47 \times 10^6 \leq \text{Re} \leq 9.51 \times 10^7$ ; therefore, viscous effects are small, and the Reynolds number may be neglected. Furthermore, the surface tension was neglected as previous studies showed that these effects are negligible except for very low values of the upstream flow depth (Rao and Shukla, 1971; Sargison 1972; Ranga Raju and Asawa, 1977; De Martino and Ragone, 1984).

Therefore, according to Eq. (6), the stage-discharge relationship is affected by the floor height ratio,  $p/B_c$ , the contraction ratio,  $r$ , and the entrance ramp slope,  $\tan \beta$ .

## Results and discussion

### Effect of the floor height on the stage-discharge relationship

Flume bed rise may occur during the flume installation. To study the effect of the floor height, for a given value of the contraction ratio,  $r$ , the stage-discharge curves associated with different values of  $p/B_c$  were compared in Figure 4. Note that  $p/B_c=0$  is an accurate flume installation in which no bed rise occurs. As shown, the floor height ratio,  $p/B_c$ , did not affect the stage-discharge curve

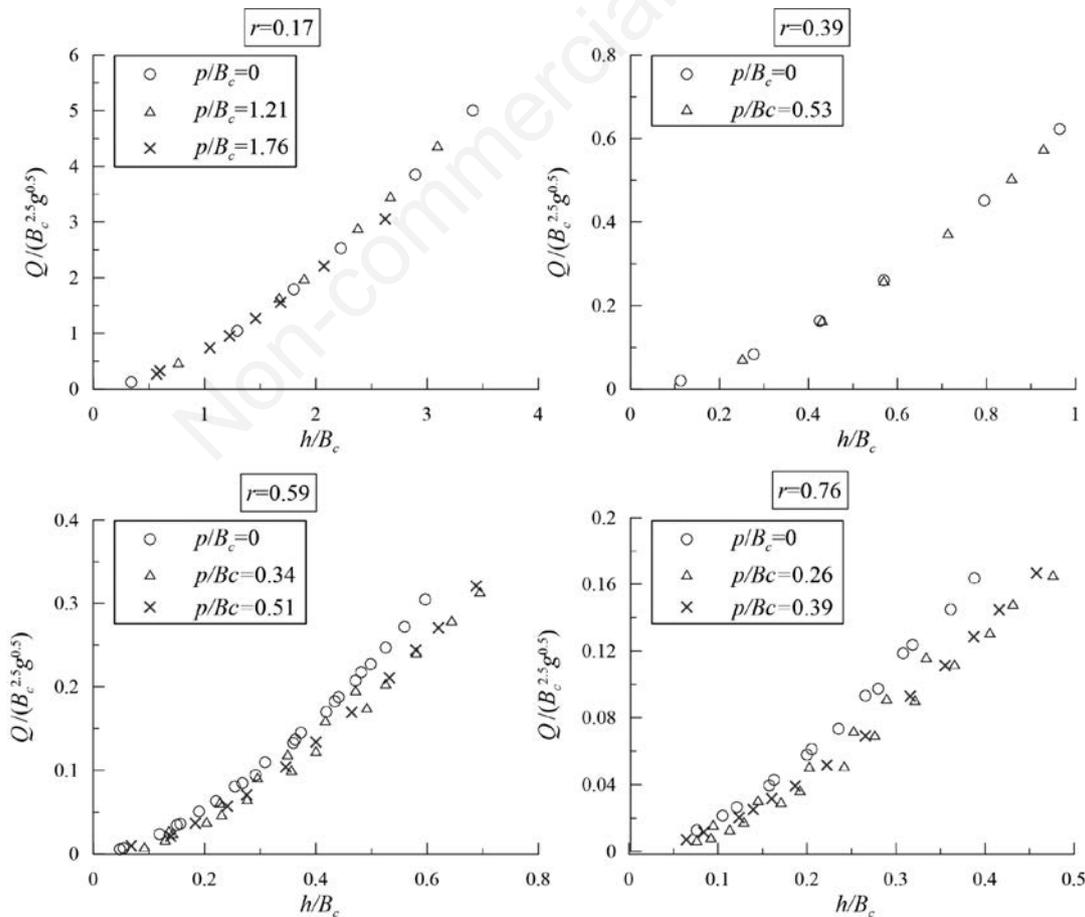


Figure 4. Effect of the floor height ratio,  $p/B_c$ , on the stage-discharge curve for different values of the contraction ratios.

for  $r=0.17$  and  $0.39$ . Consequently, the floor height ratio affects the flow capacity when the contraction ratio increases.

For a specific value of  $h/B_c$ , Figure 4 indicated that for  $r=0.59$  and  $0.79$ , a flume with no floor height, *i.e.*,  $p/B_c=0$ , had a higher discharge capacity than the cases having  $p/B_c>0$ . This might be attributed to the fact that for  $r=0.59$  and  $0.79$ , the head loss due to the effect of  $p/B_c$  increases significantly.

Therefore, according to the experimental results of this study, it is suggested to consider a floor height ratio of  $0 \leq p/B_c \leq 1.76$  with the contraction ratios of less than or equal to  $0.39$  to ensure that the floor height ratio does not influence the flow capacity. Consequently, the parameter  $p/B_c$  can be eliminated from the functional relationship Eq. (6) when  $r \leq 0.39$ .

### Effect of the entrance ramp on the stage-discharge relationship

Taking  $p/B_c$  in the range of  $0.27$  to  $1.76$  and  $r=0.17$  and  $0.39$ , the stage-discharge curves associated with different entrance ramp slopes ( $\tan \beta=0, 0.2$ , and  $1$ ) were plotted in Figure 5. This figure demonstrated that for  $r \leq 0.39$ , there was no significant effect of installing an entrance ramp on the stage-discharge curve. Consequently, the experimental investigation suggested taking  $b=0$  to minimise the construction costs.

Taking  $r=0.59$  and  $p/B_c=0.35$ , the effect of the entrance ramp slope on the stage-discharge curve was illustrated in Figure 6. As shown, for a specific value of  $h/B_c$ , the flume discharges associated with  $\tan \beta=0.2$  and  $\tan \beta=1$  were slightly higher than that obtained for  $\tan \beta=0$ . In other words, an entrance ramp increases the discharge capacity when the contraction ratio is greater than  $0.39$ .

In summary, the following recommendations are proposed: i) taking a contraction ratio in the range of  $r \leq 0.39$ , and a floor height ratio within the range of  $0 \leq p/B_c \leq 1.76$ , neither the floor height nor the entrance ramp slope affects the flume flow capacity; ii) for  $r > 0.39$  (the cases  $r=0.59$  and  $0.76$  are tested in this study), both floor height and entrance ramp slope affect the stage-discharge formula. An increased floor height has a negative impact, while an entrance ramp slope increases the discharge capacity. As a practical conclusion, from the construction point of view and to min-

imise the flume weight, it is suggested to take  $r \leq 0.39$ , and a floor height ratio of  $0 \leq p/B_c \leq 1.76$ , for constructing the portable TCB flume. No entrance ramp installation is also suggested.

### Calibrating the stage-discharge relationship by laboratory measurements

#### Central baffle flume

Taking  $r \leq 0.39$ , and a floor height ratio of  $0 \leq p/B_c \leq 1.76$ , for each value of the contraction ratio,  $r$ , the stage-discharge formula obtained by Eq. (6), depends only on the upstream head ratio,  $h/B_c$ :

$$\frac{Q}{B_c^{5/2} g^{1/2}} = m \left( \frac{h}{B_c} \right)^n \quad (7)$$

where,  $m$  and  $n$  are numerical constants. Eq. (7) is applicable when a central baffle is located in a channel, and the flume width is equal to the channel width. The parameters  $m=0.6808$  and  $n=1.6286$  were estimated, by a least-squares technique, using the experimental data of this study. As shown in Figure 7, Eq. (7) is applicable to estimate the flow rate within an error range of  $\pm 5\%$  for  $83.3\%$  of the data points. The associated mean absolute relative error is  $2.98\%$ , which is acceptable for a flow measuring device. Scale effect may be significant for minimal upstream flow depth values. No high relative error was observed in Figure 7 for small upstream flow depths. However, the minimum upstream flow depth tested in this study was  $2$  cm. Therefore, the smaller flow depths should be avoided due to possible scale effects.

#### Portable triangular central baffle flume

According to the laboratory tests, when  $r \leq 0.39$  and  $0 \leq p/B_c \leq 1.76$  neither the floor height nor an entrance ramp slope affects the flume capacity. Therefore, no entrance ramp was considered to minimise the portable flume weight (Figure 1). Taking  $p=10$  cm and  $B_c=12$  and  $15.6$  cm ( $r=0.39$  and  $0.3$ ), one may consider that the portable flume's stage-discharge formula would not be affected by floor height ratio. The flume width,  $B_f$ , was less than

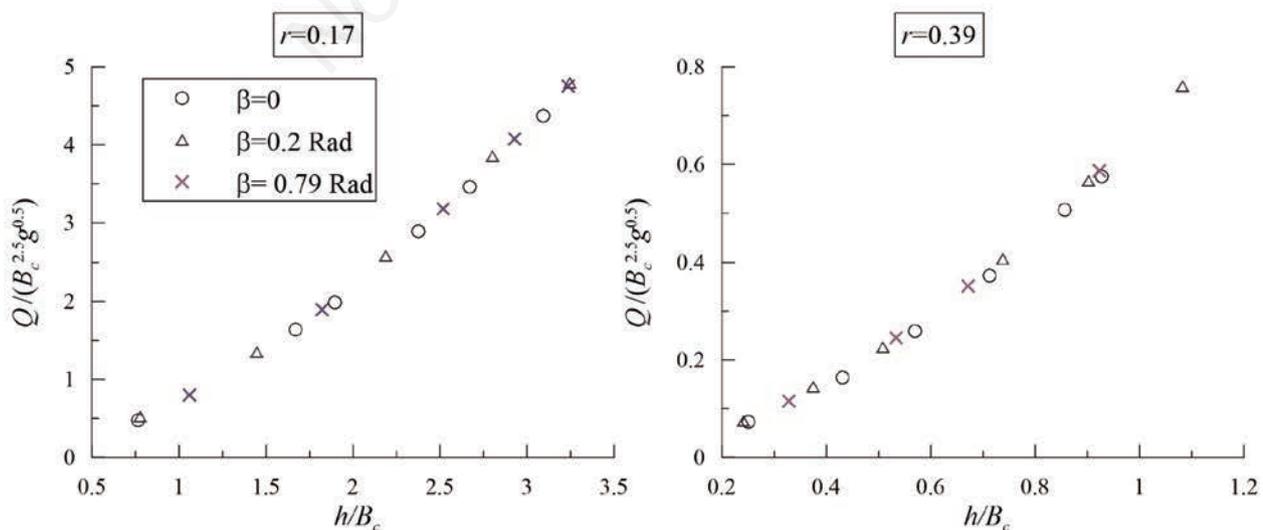


Figure 5.  $Q/(B_c^{2.5} g^{0.5})$  versus  $h/B_c$  for  $r=0.17$  and  $0.39$ .

the channel width. The inlet and outlet transitions were taken as presented in Figure 1. Smaller flume width would make the portable flume lighter. The free flow condition was defined as:

$$\varphi_1(h, Q, B_c, B_f, g, \rho, \mu) = 0 \tag{8}$$

in which  $\varphi_1$  is a functional symbol and  $B_c = B_f - b$  is the throat width.

Applying Buckingham's Theorem of dimensional analyses, the following dimensional function was obtained:

$$\frac{Q}{B_c^{5/2} g^{1/2}} = f_2\left(\frac{h}{B_c}, r\right) \tag{9}$$

in which  $f_2$  is a functional symbol and  $r = B_c/B_f$ .

Applying the incomplete self-similarity to all independent dimensionless groups, Eq. (9) was written as:

$$\frac{Q}{B_c^{5/2} g^{1/2}} = a_1 \left(\frac{h}{B_c}\right)^{a_2} r^{a_3} \tag{10}$$

Using the measured stage-discharge data of the portable flume and a least-squares technique, the coefficients  $a_1$ ,  $a_2$ , and  $a_3$  of Eq. (10) were estimated as 0.314, 1.626, and -0.697, respectively.

The comparison of Eq. (10) with the measured data points revealed that the relative error distribution was limited to the range of  $\pm 2\%$  (Figure 8). The proposed portable flume is applicable for  $0.33 \leq h/B_c \leq 1.36$  with a minimum upstream depth of 5 cm. The flume is applicable for discharges of 1.9 to 18.8 l/s. Such a span is enough for on-farm purposes.

### Field evaluation

Taking  $r = 0.39$  and  $B_c = 15.6$  cm, the validity of Eq. (10) was evaluated for the proposed portable flume field application. For this aim, the field observations were compared with the experimental stage-discharge curve obtained by Eq. (10).

As shown in Figure 9, the proposed portable TCB flume could be used effectively to obtain the flow rate through an unlined ditch. The figure also revealed that Eq. (10) was applicable to accurately determine the flow rate with a mean absolute relative error of 3.8%. The discharge varied in the range of 0.64 to 3.05 L/s. The maximum relative error of -6.3% was observed for  $Q = 0.63$  L/s located significantly out of the calibrated range of the TCB flume. Detailed field data points and the relative errors associated with Eq. (10) were listed in Table 4.

The fundamental assumptions used to develop Eq. (10) were: i) it was valid when  $r \leq 0.39$  and  $0 \leq p/B_c \leq 1.76$ ; ii) neither the floor height nor an entrance ramp slope would affect the rating curve; iii) the flow must be critical in the throat. To this end, tailwater depth must be limited according to the distinguishing condition curve; iv) the flume must be installed horizontally.

Note that, in all field measurements, the flume's bed was levelled with the ditch bed (Figure 3A), i.e.,  $p/B_c = 0$ . The acceptable accuracy of Eq. (10) revealed that the assumptions made in laboratory tests could also be extended to the field application of the portable TCB flume.

### Distinguishing condition curve

Tailwater increase may affect the flow through a TCB flume. Such a flow condition is classified as a submerged regime. For a given flow rate, a unique tailwater depth  $h_t$  exists beyond which the submerged flow condition occurs. The floor height value would affect the submergence threshold of the portable TCB flume. A distinguishing condition curve, also known as the 'modular limit', is a relationship between upstream and downstream flow depths which is employed to obtain the submergence threshold (see Bos, 1989, page 29). The following functional relationship is used to describe the maximum tailwater depth for which the free flow regime occurs,  $h_t$ :

$$\frac{h_t}{B_c} = \left(\frac{Q}{B_c^{5/2} g^{1/2}}\right)^\alpha f_3\left(\frac{p}{B_c}, r, \tan \beta\right) \tag{11}$$

in which  $\alpha$  is a coefficient and  $f_3$  is a functional symbol.

For  $\tan \beta = 0$ , the pairs  $(Q/(B_c^{2.5} g^{0.5}), h_t/B_c)$  are plotted in Figure 10. As shown, for a given  $r$ , the required maximum tailwater depth for which free-flow condition reveals, i.e.,  $h_t/B_c$ , significantly increases with higher values of  $p/B_c$ .

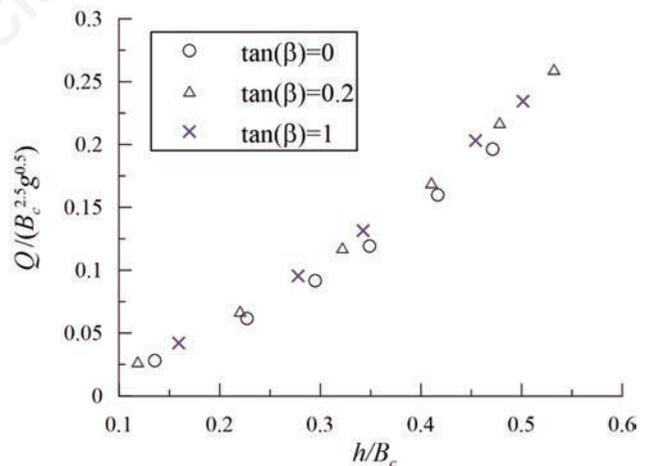


Figure 6.  $Q/(B_c^{2.5} g^{0.5})$  versus  $h/B_c$  for different values of  $\tan \beta$  with  $r = 0.59$  and  $p/B_c = 0.35$ .

Table 4. Detailed field data and the relative errors associated with Eq. (10).

Q (L/s)	h (cm)	Error (%)
0.63	1.9	-6.3
1.6	3.45	-2.4
2.17	4.3	3.4
3.05	5.1	-2.9

For  $\tan \beta=0$  and applying the incomplete self-similarity condition, Eq. (11) takes the following form:

$$\frac{h_i}{B_c} = a \left( \frac{Q}{B_c^{5/2} g^{1/2}} \right)^l \left( \frac{p}{B_c} \right)^c r^d \quad (12)$$

in which  $a$ ,  $l$ ,  $c$ , and  $d$ , are coefficients to be estimated by the available measurements. Using the experimental data of this study, the

obtained coefficients were listed in Table 5.


A comparison between the calculated and observed values of  $h_i/B_c$  is shown in Figure 11. Accordingly, using Eq. (12), 80% and 97% of the data points can be respectively estimated for  $p/B_c=0$  and  $0.27 \leq p/B_c \leq 1.76$  with relative errors of  $\pm 10\%$ .

Eq. (12) was used to estimate values of  $h_i/B_c$  associated with the triangular baffle flumes with an entrance ramp, *i.e.*,  $\tan \beta > 0$ . As shown in Figure 12, Eq. (12) can be applied to predict  $h_i/B_c$  accurately, even if an entrance ramp is constructed. The associated mean absolute relative error is 5.5%, and 90% of the data points


**Table 5. Empirical parameters and mean absolute relative errors of Eq. (12) for  $p/B_c=0$  and  $0.27 \leq p/B_c \leq 1.76$ .**

Parameter	$a$	$l$	$c$	$d$	MARE (%)
$p/B_c=0$	0.997	0.568	0	0.258	6.14
$0.27 \leq p/B_c \leq 1.76$	2.448	0.187	0.836	0.312	3.6

MARE, mean absolute relative errors.

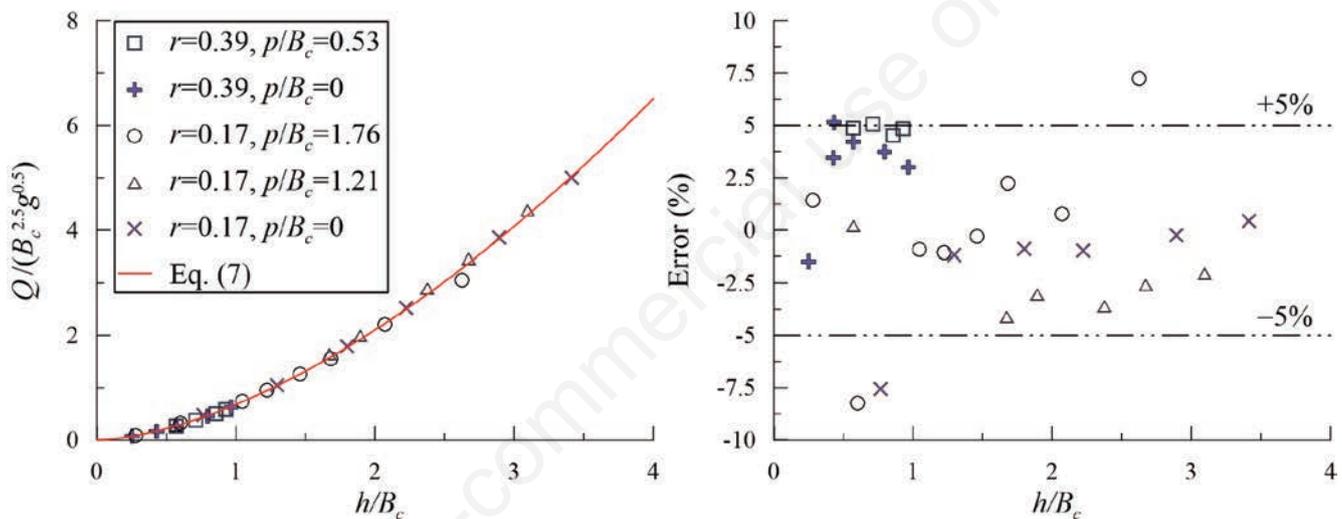

**Figure 7. Stage-discharge curve and the associated relative error distribution.**

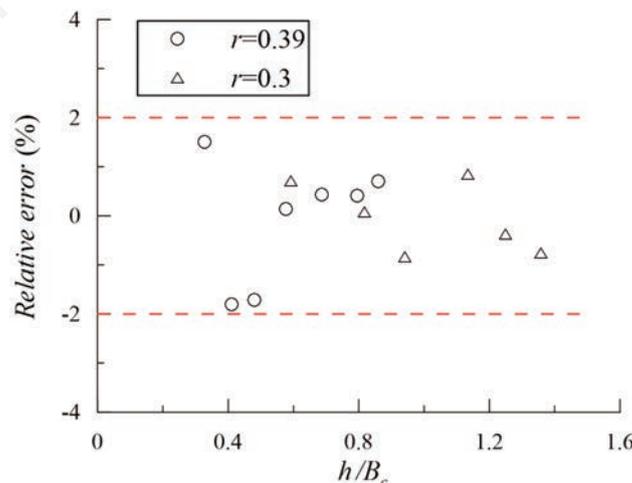

**Figure 8. Relative error distribution associated with Eq. (10) and for different values of the contraction ratios,  $r$ .**

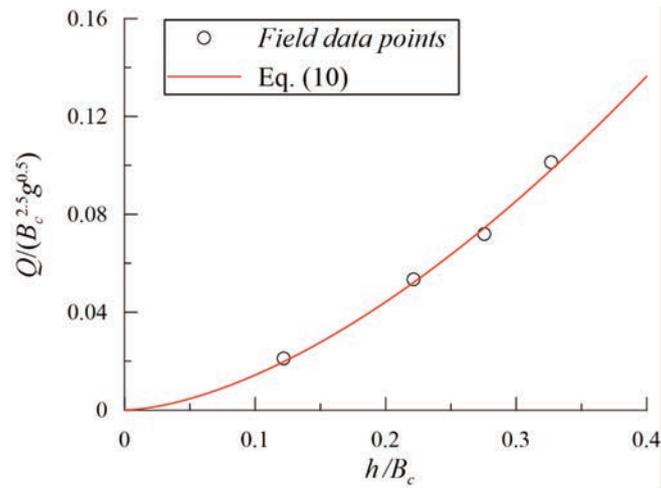


Figure 9.  $Q/(B_c^{2.5}g^{0.5})$  in terms of  $h/B_c$  for field data points and the associated values obtained by Eq. (10).

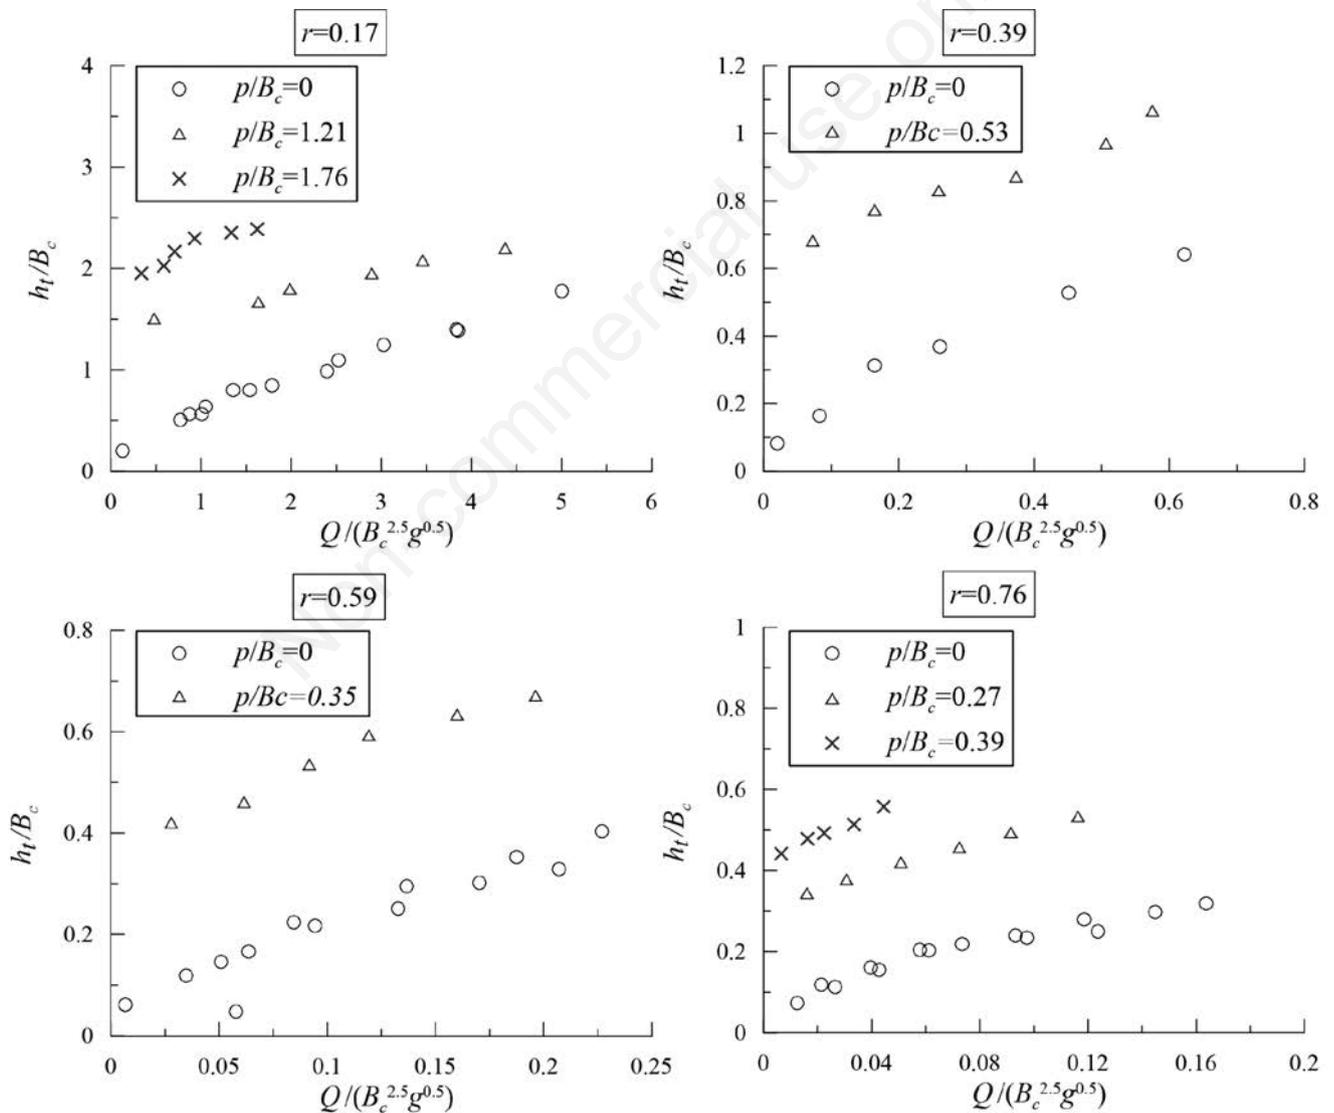


Figure 10. Values  $Q/(B_c^{2.5}g^{0.5})$  versus  $h_t/B_c$  for different values of  $r$  and  $p/B_c$ .

can be calculated with the relative errors limiting in the range of  $\pm 10\%$ .

In other words, taking  $\tan \beta > 0$  does not affect the maximum tailwater depth for which the free flow condition is anticipated.

Substituting  $Q/[B_c^{2.5}g^{0.5}]$  from Eq. (10) into Eq. (12), the following distinguishing condition curve was obtained for the portable TCB flume when  $p/B_c$  ranges from 0.64 to 0.83:

$$\frac{h_t}{B_c} = 1.971 \left( \frac{h}{B_c} \right)^{0.304} \left( \frac{p}{B_c} \right)^{0.839} r^{0.182} \tag{13}$$

The relative error distribution associated with Eq. (13) was depicted *versus*  $h/B_c$  in Figure 13. As shown, the submergence threshold was estimated within a range of  $\pm 10\%$  with a mean abso-

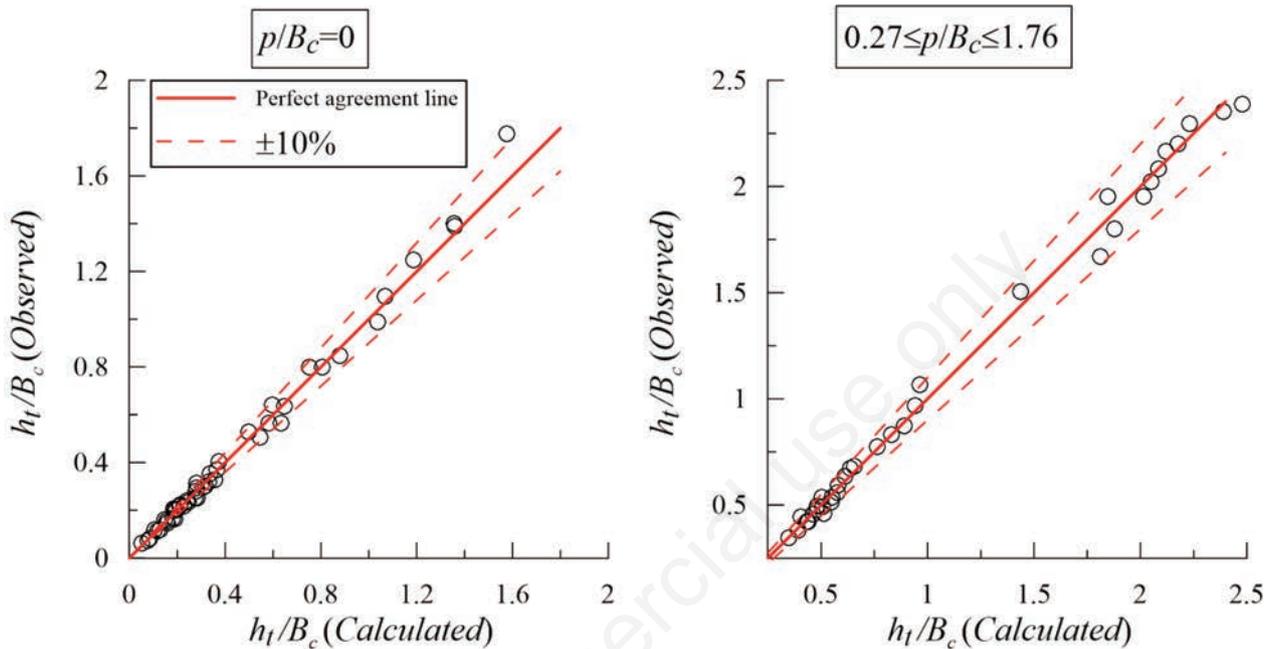


Figure 11. Calculated and observed values of  $h_t/B_c$  for  $p/B_c=0$  and  $0.27 \leq p/B_c \leq 1.76$ .

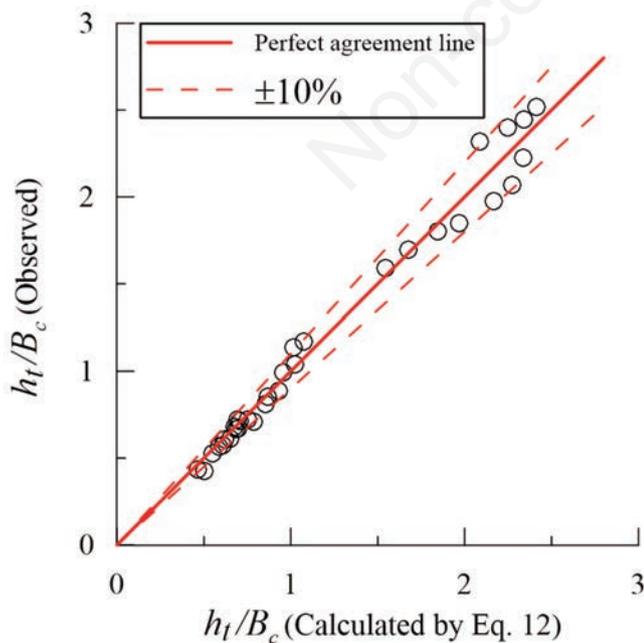


Figure 12. Calculated and observed values of  $h_t/B_c$ .

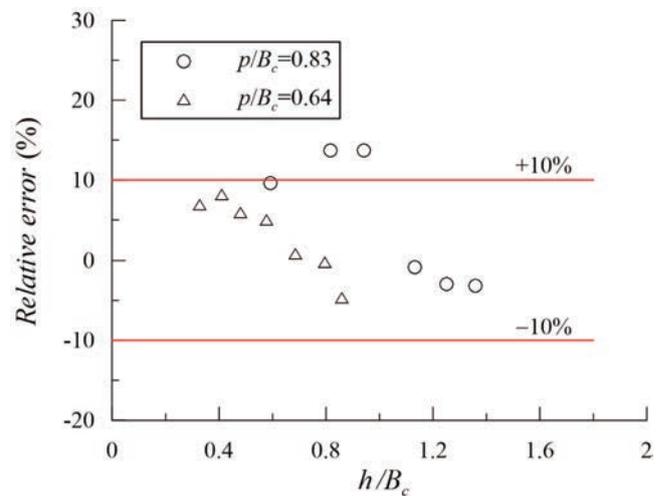


Figure 13. Relative error associated with Eq. (13) in terms of  $h/B_c$  for different values of  $p/B_c$ .

lute relative error of 5.8%.

Although the triangular shape of the central baffle minimises the flume size and weight, according to Kolavani *et al.* (2019), it might be more sensitive to submergence than the typical cases with a longer baffle length. Such a disadvantage should be considered, especially when the tailwater depth cannot be adjusted. Hence, to ensure a free flow condition, during the installation of the portable TCB flume, it is suggested to make the soil bed slightly deeper at the tailwater section to see a free overfall and a free flow condition, as shown in Figure 3B and C.

## Conclusions

For the free flow hydraulic condition, the central baffle flume was investigated by both laboratory and field investigations. The laboratory tests demonstrated that contraction ratio values of less than 0.39 would ensure that the floor height ratio did not affect the flow capacity through the TCB flume. The laboratory analysis also demonstrated that an entrance ramp could only increase the discharge capacity when the contraction ratio was more significant than 0.39. According to the laboratory tests, an optimised portable flow measurement flume was proposed, and the associated stage-discharge formula was developed. Field application of the proposed portable TCB flume demonstrated that the proposed stage-discharge curve could be used accurately to determine the flow through an unlined ditch. Finally, the distinguishing condition curve and the submergence thresholds were discussed in this paper. It is strongly advised to use the proposed portable flume for free-flow conditions in which the critical flow state must occur at the throat section. Note that the proposed rating curve is only valid within the ranges of the calibrated dimensionless parameters.

## Notations

$a, c, d, n, l$ , and  $\alpha$  = empirical coefficients;

$B$  = the approaching channel width;

$b$  = the baffle width;

$B_c = B - b$ ;

$g$  = acceleration due to gravity;

$h$  = Upstream depth;

$h_{th}$  = the maximum permitted tailwater depth to allow the free flow condition;

$H_1$  = total upstream head;

$H_c$  = specific energy at the critical flow section;

$L_s$  = Sill length;

$p$  = floor height;

$Q$  = discharge;

$Q_{BR}$  = flow rate of a venturi flume;

$Q_{BR}$  = flow rate of a bed-rise structure;

Re = Reynolds number;

$r$  ( $B_c/B$ ) = contraction ratio;

$\beta$  = entrance ramp slope angle;

$f, f_1$ , and  $f_2$  = functional symbols;

$\mu$  = water viscosity.

## References

- Barenblatt G.I. 1979. Similarity, self-similarity and intermediate asymptotics. Consultants Bureau, NY, USA.
- Barenblatt G.I. 1987. Dimensional analysis. Gordon & Breach, Science Publishers, Amsterdam, The Netherlands.
- Bijankhan M., Ferro V. 2019. Experimental study on triangular central baffle flume. Flow Measure. Instrum. 101641.
- Bos M.G. 1989. Discharge measurement structures. International Institute for Land Reclamation and Improvement/ILRI.
- De Martino G., Ragone A. 1984. Effects of viscosity and surface tension on slot weirs flow. J. Hydr. Res. 22:327-41.
- Ferro V. 2016. Simple flume with a central baffle. Flow Measure. Instrum. 52:53-6.
- Ferro V. 2018. Discussion of "Three Simple Flumes for Flow Measurement in Open Channels" by Zohrab Samani. J. Irrig. Drain. Engine. 144:8-9.
- Hager W.H. 1985. Modified venturi channel. J. Irrig. Drain. Engine. 111:19-35.
- Hager W.H. 1989. Mobile flume for circular channel. J. Irrig. Drain. Engine. 114:520-34.
- Kapoor A., Ghare A.D., Vasudeo A.D., Badar A.M. 2019. Channel flow measurement using portable conical central baffle. J. Irrig. Drain. Engine. 145:06019010.
- Lotfi Kolavani F., Bijankhan M., Di Stefano C., Ferro V., Mazdeh A.M. 2019. Experimental study of central baffle flume. J. Irrig. Drain. Engine. 145(3).
- Peruginelli A., Bonacci F. 1995. Funzionamento libero e sommerso di un misuratore di portata a risalito idraulico. Idrotecnica. Sept-Dec:261-72 [In Italian].
- Samani Z. 2017. Three simple flumes for flow measurement in open channels. J. Irrig. Drain. Engine. 143:2-5.
- Samani Z., Jorat S., Yousef M. 1991. Hydraulic characteristics of circular flume. J. Irrig. Drain. Engine. 117:558-66.
- Sargison E.J. 1972. The influence of surface tension on weir flow. J. Hydr. Res. 10:431-46.
- Ranga Raju K.G., Asawa G.L. 1977. Viscosity and surface tension effects on weir flow. J. Hydr. Division ASCE. 103:1227-31.
- Rao S.S., Shukla M.J. 1971. Characteristics of flow over weirs of finite crest width. J. Hydr. Division ASCE. 97:1807-16.