

Lecture Notes in Networks and Systems

Volume 393

Series Editor

Janusz Kacprzyk, Systems Research Institute, Polish Academy of Sciences,
Warsaw, Poland

Advisory Editors

Fernando Gomide, Department of Computer Engineering and Automation—DCA,
School of Electrical and Computer Engineering—FEEC, University of Campinas—
UNICAMP, São Paulo, Brazil

Okyay Kaynak, Department of Electrical and Electronic Engineering,
Bogazici University, Istanbul, Turkey

Derong Liu, Department of Electrical and Computer Engineering, University
of Illinois at Chicago, Chicago, USA

Institute of Automation, Chinese Academy of Sciences, Beijing, China

Witold Pedrycz, Department of Electrical and Computer Engineering, University of
Alberta, Alberta, Canada

Systems Research Institute, Polish Academy of Sciences, Warsaw, Poland

Marios M. Polycarpou, Department of Electrical and Computer Engineering,
KIOS Research Center for Intelligent Systems and Networks, University of Cyprus,
Nicosia, Cyprus

Imre J. Rudas, Óbuda University, Budapest, Hungary

Jun Wang, Department of Computer Science, City University of Hong Kong,
Kowloon, Hong Kong

The series “Lecture Notes in Networks and Systems” publishes the latest developments in Networks and Systems—quickly, informally and with high quality. Original research reported in proceedings and post-proceedings represents the core of LNNS.

Volumes published in LNNS embrace all aspects and subfields of, as well as new challenges in, Networks and Systems.

The series contains proceedings and edited volumes in systems and networks, spanning the areas of Cyber-Physical Systems, Autonomous Systems, Sensor Networks, Control Systems, Energy Systems, Automotive Systems, Biological Systems, Vehicular Networking and Connected Vehicles, Aerospace Systems, Automation, Manufacturing, Smart Grids, Nonlinear Systems, Power Systems, Robotics, Social Systems, Economic Systems and other. Of particular value to both the contributors and the readership are the short publication timeframe and the world-wide distribution and exposure which enable both a wide and rapid dissemination of research output.

The series covers the theory, applications, and perspectives on the state of the art and future developments relevant to systems and networks, decision making, control, complex processes and related areas, as embedded in the fields of interdisciplinary and applied sciences, engineering, computer science, physics, economics, social, and life sciences, as well as the paradigms and methodologies behind them.

Indexed by SCOPUS, INSPEC, WTI Frankfurt eG, zbMATH, SCImago.

All books published in the series are submitted for consideration in Web of Science.

For proposals from Asia please contact Aninda Bose (aninda.bose@springer.com).

More information about this series at <https://link.springer.com/bookseries/15179>

Mohamed Ben Ahmed ·
Anouar Abdelhakim Boudhir ·
İsmail Rakıp Karaş · Vipul Jain ·
Sehl Mellouli
Editors

Innovations in Smart Cities Applications Volume 5

The Proceedings of the 6th International
Conference on Smart City Applications

Editors

Mohamed Ben Ahmed 
Faculty of Sciences and Techniques,
Computer Engineering Department
Abdelmalek Essaadi University
Tangier, Morocco

Anouar Abdelhakim Boudhir
Faculty of Sciences and Techniques,
Computer Engineering Department
Abdelmalek Essaadi University
Tangier, Morocco

İsmail Rakıp Karas
Computer Engineering Department
Karabük University
Karabük, Turkey

Vipul Jain
Operations and Supply Chain Management
Wellington School of Business and Govern
Wellington, Wellington, New Zealand

Sehl Mellouli
Département Des Systèmes
d'Information Organisationnels
Faculty of Business Administration.
Laval University
Québec, QC, Canada

ISSN 2367-3370

ISSN 2367-3389 (electronic)

Lecture Notes in Networks and Systems

ISBN 978-3-030-94190-1

ISBN 978-3-030-94191-8 (eBook)

<https://doi.org/10.1007/978-3-030-94191-8>

© The Editor(s) (if applicable) and The Author(s), under exclusive license
to Springer Nature Switzerland AG 2022, corrected publication 2022

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

Preface

On the research area, the potential of the smart cities axis is much higher, as many cities are still at the start of their digital transformation. Because of this, the research field is known as a main driver of innovation and creativity, in order to create multiple applications in the future smart cities, ranging from safety to health, including mobility, the environment, agriculture, water, buildings, and infrastructure.

In the same way, urban governance calls for research and development of more concerted and transversal approaches, closely involving citizens and businesses in the development of smart cities. In addition to the research development, the aims of this book are also to participate in developing new uses, whether internally or toward the citizen who will be in the next and future population of those smart cities. This must attract those uses to know how they will and they can be the smart people of the next generations.

This edited book edition titled “Innovations in Smart Cities and Applications” continues providing the last researches and applications that involves the new technologies for smart cities. This edition is the fruit of the accepted and presented works in the fifth International Virtual Conference on Smart City Applications (SCA 2021) held on October 27–29, 2021, in Safranbolu, Türkiye.

SCA 2021 conference regroups original research, achieved works, and proposed architectures on the main topics of the conference. The scope of SCA 2021 covers a variety of topics with an intersection with smart cities, geo-smart information systems, education, health care, economy and digital business, building and home automation, environment and agriculture, and information technologies and computer science.

Many thanks are addressed to participants and researchers and to all keynote speakers for their valued and rich scientific talk at the conference session.

We are deeply grateful to all organizing committee members from both sides, Moroccan and Turkish teams, to all program committee members and reviewers, to all chairs of sessions for their efforts and the time spent in order to evaluate the contributions and to the success of this event.

We also would like to acknowledge and thank the Springer Nature Switzerland AG staff for their support, guidance, and for the edition of this book.

To close, we hope to express our sincere thanks to Pr. Janusz kacprzyk, Dr. Thomas Ditzinger, and Ms. Viradasarani Natarajan for their kind support and help to promote the success of this book.

Mohamed Ben Ahmed
Anouar Abdelhakim Boudhir
İsmail Rakıp Karas
Sehl Mellouli
Vipul Jain
SCA21 Chairs

Committees

Conference Chair

İsmail Rakıp Karaş Karabuk University, Türkiye

Conference General Chairs

Mohamed Ben Ahmed	FST, Tangier UAE University, Morocco
Anouar Boudhir Abdelhakim	FST, Tangier UAE University, Morocco
Bernadetta Kwintiana Ane	University of Stuttgart, Germany

Conference Technical Program Committee Chair

Vipul Jain Victoria University of Wellington, New Zealand

Publication Chair

Sehl Mellouli Laval University, Laval, Canada

Special Issues Chair

Parthasarathy Subashini Avinashilingam University, India

Local Organizing Committee

İdris Kahraman	Karabuk University, Türkiye
Emrullah Demiral	Karabuk University, Türkiye
Mustafa Aksin	Karabuk University, Türkiye
Kadriye Oz	Karabuk University, Türkiye
Hacer Kübra Köse	Sinop University, Türkiye
Berna Gunes	Karabuk University, Türkiye
Umit Atila	Karabuk University, Türkiye

Kasim Ozacar	Karabuk University, Türkiye
Yasin Ortakci	Karabuk University, Türkiye
Muhammed Kamil Turan	Karabuk University, Türkiye
Sohaib Abujayyab	Karabuk University, Türkiye
Emre Yücer	Karabuk University, Türkiye

Technical Program Committee

Ismail Rakip Karas	Karabuk University, Türkiye
Abdel-Badeeh M. Salem	Ain Shams University, Egypt
Abdullah Elen	Bandirma Onyedi Eylül University, Türkiye
Abdullah Emin Akay	Bursa Technical University, Türkiye
Abdurrahman Eymen	Erciyes University, Türkiye
Accorsi, Riccardo	Bologna University, Italy
Adib Habbal	Karabuk University, Türkiye
Adnan Alajeeli	Karabuk University, Türkiye
Aftab Ahmed Khan	Karakoram International University, Pakistan
Ahmad S. Almogren	King Saud University, Saudi Arabia
Ahmed Kadhim Hussein	Babylon University, Iraq
Alabdulkarim Lamya	King Saud University, Saudi Arabia
Alghamdi Jarallah	Prince Sultan University, Saudi Arabia
Ali Jamali	Universiti Teknologi Malaysia
Alias Abdul Rahman	Universiti Teknologi Malaysia
Alihsan Sekertekin	Cukurova University
Anabtawi Mahasen	Al-Quds University, Palestine
Anton Yudhana	Universitas Ahmad Dahlan, Indonesia
Arif Çağdaş Aydinoglu	Gebze Technical University, Türkiye
Arioua Mounir	UAE, Morocco
Assaghir Zainab	Lebanese University, Lebanon
Aydin Üstün	Kocaeli University, Türkiye
Aziz Mahboub	FSTT UAE, Morocco
Bahadır Ergun	Gebze Technical University, Türkiye
Bariş Kazar	Oracle, USA
Bataev Vladimir	Zaz Ventures, Switzerland
Behnam Alizadehashrafi	Tabriz Islamic Art University, Iran
Behnam Atazadeh	University of Melbourne, Australia
Ben Yahya Sadok	Faculty of Sciences of Tunis, Tunisia
Bessai-Mechmach Fatma Zohra	CERIST, Algeria
Beyza Yaman	Dublin City University, Ireland
Biswajeet Pradhan	University of Technology Sydney, Australia
Berk Anbaroğlu	Hacettepe University, Türkiye
Boutejdar Ahmed	German Research Foundation, Bonn, Germany
Burhan Selcuk	Karabuk University, Türkiye

Bulent Bayram	Yildiz Technical University, Türkiye
Caner Ozcan	Karabuk University, Türkiye
Caner Güney	Istanbul Technical University, Türkiye
Chadli Lala Saadia	University Sultan Moulay Slimane, Morocco
Cumhur Şahin	Gebze Technical University, Türkiye
Damir Žarko	Zagreb University, Croatia
Dominique Groux	UPJV, France
Dousset Bernard	UPS, Toulouse, France
Edward Duncan	The University of Mines & Technology, Ghana
Eehab Hamzi Hijazi	An-Najah University, Palestine
El Kafhali Said	Hassan 1st University, Settat, Morocco
Eftal Şehirli	Karabuk University, Türkiye
El Mhouti Abderrahim	FST, Al-Hoceima, Morocco
El Haddadi Anass	UAE University, Morocco
El Hebeary Mohamed Rashad	Cairo University, Egypt
El Ouarghi Hossain	ENSAH UAE University, Morocco
Elif Sertel	Istanbul Technical University, Türkiye
Emre Yücer	Karabuk University, Türkiye
Emrullah Sonuç	Karabuk University, Türkiye
En-Naimi El Mokhtar	UAE, Morocco
Enrique Arias	Castilla-La Mancha University, Spain
Fatmagül Kılıç Gül	Yıldız Technical University, Türkiye
Ferhat Atasoy	Karabuk University, Türkiye
Filip Biljecki	National University of Singapore
Fusun Balık Şanlı	Yıldız Technical University, Türkiye
Francesc Anton Castro	Technical University of Denmark
Ghulam Ali Mallah	Shah Abdullatif University, Pakistan
Habibullah Abbasi	University of Sindh, Pakistan
Haddadi Kamel Iemn	Lille University, France
Hakan Kutucu	Karabuk University, Türkiye
Hande Demirel	İstanbul Technical University, Türkiye
Hazim Tawfik	Cairo University, Egypt
Huseyin Bayraktar	General Directorate of GIS, Türkiye
Hüseyin Pehlivan	Gebze Technical University, Türkiye
Huseyin Topan	Bulent Ecevit University, Türkiye
Huseyin Zahit Selvi	Konya Necmettin Erbakan University
İbrahim Baz	İstanbul Ticaret University, Türkiye
İlhami Muharrem Orak	Karabuk University, Türkiye
Ilker Türker	Karabuk University, Türkiye
Iman Elawady	Ecole Nationale Polytechnique d'Oran, Algeria
Indubhushan Patnaikuni	RMIT - Royal Melbourne Institute of Technology, Australia
İsa Avcı	Karabuk University
Ismail Büyüksalih	Bimtaş A.Ş., Türkiye
Ivin Amri Musliman	Universiti Teknologi Malaysia

J. Amudhavel	VIT Bhopal University, Madhya Pradesh, India
Jaime Lioret Mauri	Polytechnic University of Valencia, Spain
Jus Kocijan	Nova Gorica University, Slovenia
Kadir Ulutaş	Karabuk University
Kasım Ozacar	Karabuk University
Khoudeir Majdi	IUT, Poitiers University, France
Labib Arafeh	Al-Quds University, Palestine
Laila Moussaid	ENSEM, Casablanca, Morocco
Lalam Mustapha	Mouloud Mammeri University of Tizi Ouzou, Algeria
Loncaric Sven	Zagreb University, Croatia
Lotfi Elaachak	FSTT, UAE, Morocco
Mademlis Christos	Aristotle University of Thessaloniki, Greece
Mehmet Akbaba	Karabuk University, Türkiye
Mete Celik	Erciyes University, Türkiye
Miranda Serge	Nice University, France
Mohamed El Ghani	University of Bergen, Norway
Mohammad Sharifikia	Tarbiat Modares University, Iran
Mousannif Hajar	Cadi Ayyad University, Morocco
Mufit Cetin	Yalova University, Türkiye
Muhamad Uznir Ujang	Universiti Teknologi Malaysia
Mike Horhammer	Oracle, USA
Muhammad Imzan Hassan	Universiti Teknologi Malaysia
Muhammed Kamil Turan	Karabuk University, Türkiye
Murat Yakar	Mersin University, Türkiye
Murat Lüy	Kırıkkale University, Türkiye
Mustafa Akgul	Istanbul University, Türkiye
My Lahcen Hasnaoui	Moulay Ismail University, Morocco
Mykola Kozlenko	Vasyl Stefanyk Precarpathian National University, Ukraine
Nesrin Aydin Atasoy	Karabuk University, Türkiye
Nusret Demir	Akdeniz University, Türkiye
Oğuz Fındık	Karabuk University, Türkiye
Oğuzhan Menemencioğlu	Karabuk University, Türkiye
Omar Dakkak	Karabuk University, Türkiye
Omer Muhammet Soysal	Southeastern Louisiana University, USA
Ouedemi Meriem	INP - ENSEEIHT Toulouse, France
Rachmad Andri Atmoko	Universitas Brawijaya, Indonesia
R. S. Ajin	DEOC DDMA, Kerala, India
Rani El Meouche	Ecole Spéciale des Travaux Publics, France
Raif Bayır	Karabuk University, Türkiye
Rafet Durgut	Karabuk University, Türkiye
Sagahyroon Assim	American University of Sharjah, United Arab Emirates
Saied Pirasteh	University of Waterloo, Canada

Savas Durduran	Konya Necmettin Erbakan University, Türkiye
Sedat Bakici	Turkish Cadastre Office, Türkiye
Senthil Kumar	Hindustan College of Arts and Science, India
Serdar Bayburt	Bimtaş A.Ş., Türkiye
Seyit Ali Kayış	Karabuk University, Türkiye
Sibel Senan	Istanbul University, Türkiye
Siddique Ullah Baig	COMSATS Institute of Information Technology, Pakistan
Sinasi Kaya	İstanbul Technical University, Türkiye
Slimani Yahya	Manouba University, Tunisia
Sohaib Abujayyab	Karabuk University, Türkiye
Sonja Grgić	Zagreb University, Croatia
Sri Winiarti	Universitas Ahmad Dahlan, Indonesia
Suhaibah Azri	Universiti Teknologi Malaysia
Sunardi	Universitas Ahmad Dahlan, Indonesia
Sule Erten Ela	Ege University, Türkiye
Tarik Adnan Almohamad	Karabuk University, Türkiye
Tebibel Bouabana Thouraya	ESI, Alger, Algeria
Tolga Ensari	Istanbul University, Türkiye
Umit Atila	Karabuk University, Türkiye
Umit Isikdag	Mimar Sinan Fine Arts University, Türkiye
Umran Koylu	Erciyes University, Türkiye
Xiaoguang Yue	International Engineering and Technology Institute, Hong Kong
Yasin Ortakçı	Karabuk University, Türkiye
Yasyn Elyusufi	FSTT, UAE, Morocco
Yüksel Çelik	Karabuk University, Türkiye
Youness Dehbi	University of Bonn, Germany
Yusuf Arayıcı	Northumbria University, UK
Yusuf Yargı Baydilli	Karabuk University, Türkiye
Zafer Albayrak	Karabuk University, Türkiye
Zennure Uçar	Düzce University, Türkiye

Keynotes

Zero-Touch Management and Orchestration of Network Slices in 5G and Beyond Networks

Adlen Ksentini

Abstract. 6G systems are expected to serve a massive number of extremely heterogeneous network slices that cross multiple technological domains (i.e., RAN, edge, cloud, and core), posing significant challenges to classical centralized management and orchestration approaches in terms of scalability and sustainability. Within this context, a distributed and intelligent management and orchestration system is mandatory. This keynote presents the challenges related to the management and orchestration of network slices in 5G and beyond mobile networks. Based on these requirements, a hierarchical, distributed, and AI-driven management framework is introduced, featuring a zero-touch service management concept.



Biography: Prof. Adlen Ksentini is IEEE Communications Society Distinguished Lecturer. He received his Ph.D. degree in computer science from the University of Cergy-Pontoise in 2005. From 2006 to 2016, he worked at the University of Rennes 1 as Assistant Professor. Since March 2016, he has been Professor in the communication systems department of EURECOM, Sophia-Antipolis, France, where he leads the Network Softwarization group. He is involved in several European Union projects related to network slicing and 5G, such as the 5G!Drones and MonB5G projects

Smart Cities Strategies: Critical Success Factors

Domingos Santos



Biography: Domingos Santos holds a degree in Environmental Engineering (New University of Lisbon), a master's degree in regional and urban planning (Technical University of Lisbon) and a Ph.D. in environmental applied sciences (University of Aveiro). He is Professor of the Polytechnic Institute of Castelo Branco (IPCB) where he has taught curricular units in the field of social development planning, development programs and projects, innovation and entrepreneurship, as well as sustainable development. He has developed teaching activities in the framework of cooperation and mobility programs, in University of Valladolid—Faculty of Economic and Business Sciences and University of Extremadura, both in Spain; Lithuania Business University of Applied Sciences; and, in Brazil, at Dom Bosco Catholic University and University of Santa Cruz do Sul.

Design for Energy: Prosumer Buildings

Yusuf Arayici

Northumbria University, UK



Biography: Yusuf Arayici is Professor in construction project management at Northumbria University. With an international outlook, he previously fulfilled an academic management role as Dean. He also successfully completed his research fellowship TUBITAK (Research Council of Türkiye) in Digital Construction. Since 2000, his research projects have ranged from building information modeling to sustainability. He has led substantial research groups over a prolonged period of time through continuous cycles of research with funded research projects, has graduated many Ph.D. and MSc students, and has published more than 100 papers and five books. Currently, he is researching on AI-supported heritage BIM.

Smart Buildings to Smart Cities—The Role of BIM and GIS Integration

Mohsen Kalantari

University of Melbourne



Biography: Mohsen Kalantari is Associate Professor in geomatics and Associate Director at the Center for SDI and Land Administration in the Department of Infrastructure Engineering at the University of Melbourne, Australia. He teaches BIM, land administration systems, and spatial analysis. He is also Co-Founder of Faramoon, a start-up focusing on the automatic generation of building models from point clouds. His research covers the geospatial information value chain, including sourcing and capturing fit-for-purpose data, engineering data models for optimized storage and visualization, organizing, disseminating geospatial data, and leveraging geospatial data by integrating it with other data.

Smart Sustainable Urbanism

Bakr Aly Ahmed

North Dakota State University, USA



Biography: Bakr Aly Ahmed has nearly 27 years of academic and teaching experience in architecture and design criticism. Prior to joining the faculty of NDSU, he has completed his Ph.D. in environmental design and planning from Virginia Tech and a master's in architecture focusing on the prefabrication of building and the mass production of housing projects. In parallel, he has maintained a professional practice of consultant and design work in numerous projects which included beach resorts, housing developments, and mix-use urban projects. His research interest focuses on sustainable design modeling, environmental capacity measurements, and simulation modeling for pedestrian movement in large buildings.

Contents

Smart City

Smart City Research Between 1997 and 2020: A Systematic Literature Review 3
Souad El Hilali and Ahmed Azougagh

Human Computation Based Platform for Citizen Services in Smart Cities 17
Adnan Yahya, Yazan Yahya, Nibras Misk, and Hamzah Hijja

Smart Home Study Within the Scope of Urban Transformation Project: Case of MATCHUP Antalya Project 29
Neşe Özçandır and Sevim Ateş Can

Spatial Analysis for Smart City Approach: The Case of Beşiktaş-Etiler Neighborhood 41
Anıl Çakır, Enver Murat Karababa, Furkan Talha Erdemir, Berfin Şenik, and Elif Kutay Karaçor

Utilization of the Visiting Jogja Mobile Application as a Provider of Information Regarding Limitations of Tourism Activities During the COVID-19 Pandemic in the Special Region of Yogyakarta 53
Candra Triastutiningsih and Rini Rachmawati

Intelligent Competitiveness of Logistics Companies Based on Benchmarking Approach 65
Mohamed Achraf Laïssaoui, Ouail El imrani, and Aziz Babounia

An Integrated Human-AI Framework Towards Organizational Agility and Sustainable Performance 73
Mohamed Amine Marhraoui, Mohammed Abdou Janati Idrissi, and Abdellah El Manouar

The Place of Stock Photography as a Digital Commerce in Turkey	89
İsa Avcı, Murat Koca, and Büşra Uysal	
Fuzzy Classification of the Flow of Events for Decision-Making in Smart Systems	103
Anatolii Kargin and Tetyana Petrenko	
A Decision Tree-Based Model for Tender Evaluation	115
Samuel Kumbu Mandale and Bernard Shibwabo Kasamani	
A Centralized Credit Scoring Prototype for Microlending Institutions Using Neural Networks	131
Law Karingithi Maina and Bernard Shibwabo Kasamani	
Smart & Sustainable Rural Settlements Exam–The Plateau of Obruk	149
Aziz Cumhur Kocalar	
Smart Mobility and Intelligent Infrastructures	
Bayesian Regression Model Estimation: A Road Safety Aspect	163
Magda Marek	
Improving Vehicle Localization with Two Low-Cost GPS Receivers . . .	177
Elnaz Namazi, Rudolf Mester, Chaoru Lu, Markus Metallinos Log, and Jingyue Li	
Current Trends in Smart Cities: Shared Micromobility	187
Rukiye Gizem Öztaş Karlı and Selma Çelikyay	
A Resilient Smart Architecture for Road Surface Condition Monitoring	199
Vincenzo Agate, Federico Concone, and Pierluca Ferraro	
A New Graph Method Based on Deep Learning for Smart Intersections	211
Erhan Turan, Beşir Dandıl, and Engin Avcı	
Smart Service Supply Chain and Just Walk Out Technology: A Netnographic Approach	223
Badr Bentalha and Aziz Hmioui	
Anomaly Detection in Region Mobility Utilization Using Daily Taxi Trajectory Dataset	237
Yesim Dokuz and Ahmet Sakir Dokuz	
Collaborative Ant Colony Multi-agent Planning System for Autonomous Mobile Robots in a Static Environment	249
Chaymaa Lamini, Said Benhlila, and Moulay Ali Bekri	

Smart Energie Management

CFD Study of the Flow and Heat Transfer Through an Unvented Trombe Wall 269

Zouhair Charqui, Mohammed Boukendil, Lahcen El Moutaouakil, Rachid Hidki, and Abdelhalim Abdelbaki

Energy Management Techniques in Off Grid Energy Systems: A Review 281

Mohamed Elweddad, Muhammet Tahir Guneser, and Ziyodulla Yusupov

Effect of Thermal Radiation on Natural Convection in an Air-Filled Cavity with an Inclined Heat-Generating Elliptical Body 293

Rachid Hidki, Lahcen El Moutaouakil, Mohammed Boukendil, Zouhair Charqui, and Abdelhalim Abdelbaki

Numerical Simulation of Third-Generation Solar Cells Based on Kesterite CZTSSe Using SCAPS-1D 305

Lhoussayne Et-taya, Touria Ouslimane, and Abdellah Benami

Nonlinear Backstepping Control for Photovoltaic System Connected to the Grid Through Inverter 315

Fatim-Zahra Zaghar, El Mehdi Karami, Mohamed Rafi, and Abderraouf Ridah

HBIM and Thermal Performance in Historical Buildings 327

Ö. Özeren and M. Korumaz

Thermal Modeling for Underground Cable Under the Effect of Thermal Resistivity and Burial Depth Using Finite Element Method . . . 339

Abdullah Ahmed Al-Dulaimi, Muhammet Tahir Guneser, and Alaa Ali Hameed

Impact of Covid-19 Pandemic on Smart Natural Gas Grids and Infrastructure Companies 353

Cevat Özarpa, İsa Avci, Bahadır Furkan Kinaci, Hamza Yetik, and Suat Arapoğlu

Smart Devices and Intelligent Softwares

Programming Nao as an Educational Agent: A Comparison Between Choregraphe and Python SDK 367

Anushka Subedi, Dipesh Pandey, and Deepti Mishra

Exploring and Extending Research in Multi-vendor Software Ecosystem 379

Anshul Rani, Deepti Mishra, and Aida Omerovic

Pre-planning Process Model in Agile Global Software Development . . .	393
Hajar Lamsellak, Houda Metthahri, Mohammed Ghaouth Belkasmi, and Mohammed Saber	
Software Quality Prediction Using Machine Learning	401
Bhoushika Desai and Roopesh Kevin Sungkur	
Phone Wallet for Mobile Payment in Algeria	413
Abdelkader Belkhir, Maria Belkhir, and Fayçal Bouyakoub	
TV Recommendation for Multiple Users Based on Movie Ratings	421
Wassila Guebli and Abdelkader Belkhir	
Establishment of a Watch Platform of Public Sustainable Purchase in Morocco	435
Tarik El Haddadi, Mohamed Ben Ahmed, and Taoufik Mourabit	
Smart E-Healthcare	
Data Encryption for E-Health Service	447
Karima Djouadi and Abdelkader Belkhir	
A Deep Learning Approach for the Diabetic Retinopathy Detection . . .	459
Riad Sebti, Siham Zroug, Laid Kahloul, and Saber Benharzallah	
An Innovative Respiratory Rate Detection System Using Adaptive Filter with Speech Boundaries Detection Algorithm in Audio Signal . . .	471
Ahmet Reşit Kavsaoğlu and Mohamed Elhashmi	
Feature Extraction Methods for Predicting the Prevalence of Heart Disease	481
Ivoline C. Ngong and Nurdan Akhan Baykan	
Quality Attributes for Evaluating IoT Healthcare Systems	495
Loubna Chhiba, Abdelaziz Marzak, and Mustapha Sidqui	
Early Prediction of ICU Admission Within COVID-19 Patients Using Machine Learning Techniques	507
Ikram Maouche, Sadek Labib Terrissa, Karima Benmohammed, Nouredine Zerhouni, and Safia Boudaira	
Agent-Based Model for Analyzing COVID-19 Infection in the Campus Using AnyLogic Software	519
W. X. Gan and S. Amerudin	

Smart GIS and Earth Management

Smart Prediction System for Territorial Resilience at the Large-Scale Level. Case Study of the Seasonal Forest Fires Risk in Northern Morocco 533

Hicham Mharzi-Alaoui, Jean-Claude Thill, H. Bahi, H. Hajji, F. Assali, and S. Moukrim

Mapping of the Study Area with GIS a Tool for the Description of Study Sites in Epidemiology 549

Hajar El Omari, Abdelkader Chahlaoui, Fatima Zahra Talbi, Abdelkarim Taam, and Abdelhakim El Ouali Lalami

Geodesign – a New Approach for Rapid Development of Planning and Carbon Sequestration Scenarios 559

Fred Barış Ernst, Abdullah İzzeddin Karabulut, and Mehmet İrfan Yeşilnacar

Assessment of Rapid Urbanization Effects with Remote Sensing Techniques 571

Nur Yagmur, Adalet Dervisoglu, and B. Baha Bilgilioglu

Indexing Approach for the Evaluation of Heavy Metals in Drinking Water Produced by a Moroccan Water Treatment Plant. 587

Abderrahman Achhar, Mohamed Najy, Driss Belghyti, and Almehti Alibrahimi

Envirolarm: A Mobile App to Manage Natural Hazards – Scenarios for a Small Island States 597

Rikeesh Kumar Ramjattun, Mainkah Shicksha Rampersad, and Roopesh Kevin Sungkur

Mechanical Characterization of a Geoconcrete Composite: Laterite with Addition of Peanut Shell 607

Amadou Warore, Biram Dieng, Seydou Nourou Diop, and Senghane Mbodj

Smart Water Management

Characteristics and Assessment of Heavy Metals in the Water of Lake Sidi Boughaba (Kenitra, Morocco) 621

Mohamed Najy, Fatima Zahra Talbi, Hassan Ech-chafay, Omar Akkaoui, Nordine Nouayti, and Driss Belghyti

Multiple Water Reservoirs in African Continent: Scarcity, Abundance and Distribution 629

Ahmed El Bakouri, Mourad Bouita, Fouad Dimane, Mohamed Tayebi, and Driss Belghyti

Seasonal Dynamics of Sandflies and Soil Texture of Breeding Sites, Aichoune Locality, Sefrou Province, Morocco	645
Fatima Zahra Talbi, Mohamed Najy, Hajar El Omari, Abdelkarim Taam, and Abdelhakim El Ouali Lalami	
Hydrogeochemical Study of the Hamma My Yacoube, Sidi Slimane – Morocco	657
Salah Aitsi, Jalal Ettaki, Khalid Doumi, Ahmed Chabli, and Driss Belghyti	
Hydrogen Production via Wastewater Electrolysis—An Integrated Approach Review	671
M. Cartaxo, J. Fernandes, M. Gomes, H. Pinho, V. Nunes, and P. Coelho	
Flood Aleas Diagnostic and Assessment Case of the Jebha Zone	681
Mohammed Benessayyad, Soufiane Saber, Driss Belghyti, and Kacem Naimi	
Assessment of the Intensity of Floods and Study of Their Impact on the Ourika Area	691
S. Saber, M. Benessayyad, M. S. Elyoubi, and D. Belghity	
Smart Education and Intelligent Learning Systems	
Teaching and Learning in a Virtual Environment: The Case of a Regulated Access Institution in Morocco	705
Nadia El Ouesdadi and Sara Rochdi	
Authoring Systems in Computer-Based Education: Learning Efficacy and Opportunities	719
Oussama Hamal, Housseine Bachiri, Nour-eddine El Faddouli, and Samir Bennani	
Toward Using Cloud Computing at Universities in Developing Countries Considering the Covid-19 Crisis	733
M'rhaouarh Ibtiissam, Chafiq Nadia, and Namir Abdelwahed	
The Influence of Mathematics on Students' Performance in Computer Programming	745
Mayowa A. Sofowora, Seraphin D. Eyono Obono, and Abdultaofeek Abayomi	
Comparison of the Availability of Online Platforms for Distance Instrument Training According to Various Variables	757
Mert Ergül and Şevval Satıcı	
A Technological Transformation in Music Talent Exams: A Start for Smart Technology with the BILSEM Music Diagnostic Exam Post-2018	767
Ahmet Serkan Ece, Hasan Hakan Okay, Sefa Zeybel, and Şevval Satıcı	

Data Science Technologies and Social Media Analysis

Toward a Smart Approach of Migration from Relational System DataBase to NoSQL System: Transformation Rules of Structure	783
--	------------

Abdelhak Erraji, Abderrahim Maizate, and Mohammed Ouzzif

A New Algorithm for Data Migration from a Relational to a NoSQL Oriented Column Database	795
---	------------

Ahmed Dourhri, Mohamed Hanine, and Hassan Ouahmane

Improving a New Data Lake Architecture Design Based on Data Ponds and Multi-Agent Paradigms	815
--	------------

Jabrane Kachaoui and Abdessamad Belangour

Data Lakes: A Survey Paper	823
---	------------

Mohamed Cherradi and Anass EL Haddadi

Automatic Sarcasm Detection in Dialectal Arabic Using BERT and TF-IDF	837
--	------------

Soukaina Mihi, Brahim Ait Ben Ali, Ismail El Bazi, Sara Arezki,
and Nabil Laachfoubi

MAC: An Open and Free Moroccan Arabic Corpus for Sentiment Analysis	849
--	------------

Moncef Garouani and Jamal Kharroubi

Sentiment Analysis Using Machine Learning and Deep Learning on Covid 19 Vaccine Twitter Data with Hadoop MapReduce	859
---	------------

Seda Kul and Ahmet Sayar

Image Processing, Recognition Systems and 3D Modelling

Classification of RASAT Satellite Images Using Machine Learning Algorithms	871
---	------------

Sohaib K. M. Abujayyab, Emre Yücer, I. R. Karas, I. H. Gultekin,
O. Abali, and A. G. Bektas

Study the Effect of Noise on Compressed Images Used in Smart Application Based on JPEG Standard	883
--	------------

Elawady Iman and İsmail Rakıp Karas

Comparative Study Between the Rectangular and Trapeze Design of Plasmonic Nanoparticles	893
--	------------

H. Oubeniz, Z. Oumekloul, Y. Achaoui, A. Mir, and A. Bouzid

Impact of Standard Image Compression on the Performance of Image Classification with Deep Learning	901
---	------------

Tajeddine Benbarrad, Marouane Salhaoui, Hatim Anas,
and Mounir Arioua

Ship Detection in Optical Remote Sensing Images Using YOLOv4 and Tiny YOLOv4	913
Esra Yildirim and Taskin Kavzoglu	
Wall Size Prediction from 2D Images with the Help of Reference Objects	925
Seda Kul and Ahmet Sayar	
Improvements on Road Centerline Extraction by Combining Voronoi Diagram and Intensity Feature from 3D UAV-Based Point Cloud	935
Serkan Biçici and Mustafa Zeybek	
Towards a 3D Real Estate Valuation Model Using BIM and GIS	945
Muhammed Oguzhan Mete, Dogus Guler, and Tahsin Yomralioglu	
Classification of Mobile Laser Scanning Point Cloud in an Urban Environment Using kNN and Random Forest	963
Semanur Seyfeli and Ali Ozgun Ok	
Deep Learning Models	
Performance Evaluation of Transfer Learning for Surface Defect Classification	977
Tajeddine Benbarrad, Mounir Arioua, and Hatim Anas	
Generic Automated Implementation of Deep Neural Networks on Field Programmable Gate Arrays	989
El Hadrami Cheikh Tourad and Mohsine Eleuldj	
A Deep Convolutional Neural Networks for the Detection of Cervical Cancer Using MRIs	1001
Ichrak Khoulqi and Najlae Idrissi	
Product Quality Prediction of 95% Naphtha Cut Point in Crude Distillation Unit Using Artificial Neural Networks	1011
Filiz Al-Shanableh	
A Smart Recipe Recommendation System Based on Image Processing and Deep Learning	1023
Seda Kul and Ahmet Sayar	
IoT Technologies and Connectivity Architectures	
5G Implementation in Ibn Tofail University	1037
Hafida Amgoune and Tomader Mazri	
Designing a LoRa Network Using Dijkstra’s Algorithm	1047
Ali Semih Yilmaz and Özlem Öztürk	

Android Application Test for GPS Geolocation Using CN	1057
S. M. H. Irid, M. H. Hachemi, H. E. Adardour, and M. Hadjila	
A Predictive and Scalable Architecture Based on IoT and Fog Computing for Smart City Applications	1071
Boudanga Zineb, Benhadou Siham, and Leroy Jean-Philippe	
Smart Security	
Conceptual Model for Crowd-Sourcing Digital Forensic Evidence	1085
Stacey O. Baror, H. S. Venter, and Victor R. KEBANDE	
The Proposed Self-defense Mechanism Against Security Attacks for Autonomous Vehicles	1101
Tomader Mazri and Siham Tibari	
Chaotic Light Weight Authentication Protocol for Vehicular Adhoc Network	1113
G. Kothai and E. Poovammal	
Security Classification of Smart Devices Connected to LTE Network	1125
Samatar Mohamed Ali, Muhammet Çakmak, and Zafer Albayrak	
Performance of Ad-Hoc Networks Using Smart Technology Under DDoS Attacks	1133
Aden Ali Said, Muhammet Çakmak, and Zafer Albayrak	
A Comprehensive Evaluation of Cryptographic Ciphers on Secure Publish/Subscribe Communications for IoT Devices	1141
Seda Kul and Ahmet Sayar	
Correction to: Multiple Water Reservoirs in African Continent: Scarcity, Abundance and Distribution	C1
Ahmed El Bakouri, Mourad Bouita, Fouad Dimane, Mohamed Tayebi, and Driss Belghyti	

A Resilient Smart Architecture for Road Surface Condition Monitoring

Vincenzo Agate, Federico Concone, and Pierluca Ferraro

Department of Engineering, University of Palermo, Palermo, Italy,
{vincenzo.agate, federico.concone, pierluca.ferraro}@unipa.it

Abstract. Nowadays, road surface condition monitoring is a challenging problem that cannot be addressed with traditional techniques. In this paper we propose an architecture for monitoring the condition of road surfaces based on the paradigm of Mobile Crowdsensing. First, a surface detection module extracts high level features from raw data, indicating the presence of hazards. Then, in order to make the system resilient to attacks, the system exploits a reputation module to identify malicious users and filter out unreliable data. Finally, a truth discovery module aggregates the resulting information to obtain the desired truth values. Experiments carried out on a real world dataset prove the resilience of the proposed system to different attacks and the accuracy achieved.

Keywords: anomaly detection, road monitoring

1 Introduction

During their lifetime, road infrastructures are subject to continuous degradation and structural damage, thus the maintenance, preservation and renewal of sustainable and resilient road surfaces has been a major challenge in recent times [1]. Several factors pose threats to the good condition of the roadway system and thus to public safety. For example, the durability of road surfaces can gradually degrade due to aging under natural environmental conditions and due to the normal operating loads to which such roads are constantly subjected.

Natural phenomena such as earthquakes and strong winds can cause serious damage even when these events are not particularly severe. All of these factors lead to changes in various physical characteristics of the structures themselves, which in turn alter their structural behavior.

In this regard, researchers, engineers and city administrations have long recognized the importance of carrying out monitoring programs to check the health status of buildings and road infrastructures [2], in order to ensure their structural integrity before they require costly interventions or cause potentially catastrophic consequences. It is worth noticing that the currently adopted monitoring systems for the health of road infrastructures are generally based on the measurement and analysis of their dynamic response [3]. Although these approaches can provide highly accurate global information on the state of the structures, they require the installation of numerous fixed sensors and constant access to

electrical power. Clearly, considering the sheer extension of the road infrastructure, instrumentation and installation costs become prohibitive [4, 5]. Thus, most roads are not regularly monitored, leading to irreparable structural damage, or even collapses and casualties when technical interventions are delayed for too long. In this context, it is imperative to develop cost-effective solutions for rapid and continuous structural status assessment that can be deployed extensively on the majority of road infrastructures without additional cost [6].

We propose a smart architecture for road surface monitoring that aggregates user-submitted data to infer high-level information about the health status of road infrastructures, by embracing the Mobile Crowdsensing (MCS) paradigm. The system also leverages a reputation management system to give more importance to data submitted by trusted users and thus improve the overall QoI [7].

The remainder of the paper is organized as follows. Related work is outlined in Section 2. Our proposed architecture is described in Section 3, focusing on the most important aspects related to road surface detection, reputation assessment and truth discovery. We present our experimental evaluation in Section 4, and finally, we draw our conclusions in Section 5.

2 Related Work

MCS [8] is a paradigm which allows a large group of individuals to collect and share information about phenomena of public interest. This is made possible by the now overwhelming availability of mobile devices capable of measuring and analyzing event of interest in the physical world. Such devices generally incorporate a plethora of sensors of all kinds, e.g., accelerometers, gyroscopes, and GPS, which can be exploited to capture low level data on phenomena of interest [9]. For the purpose of road condition monitoring, data provided by accelerometers are of great interest, especially when they are geolocalized by GPS sensors. An active role in MCS systems is played by the user community, which is responsible for monitoring large-scale phenomena that would be impossible for a single entity to measure. The applications of this paradigm are innumerable, as testified by the large body of related work produced in recent years. Indeed, MCS is widely employed in areas such as environmental pollution monitoring [10], health monitoring, and smart environments [11]. Moreover, this paradigm can also provide a significant aid to the early detection of existing anomalies on the vehicular road network.

An important aspect of MCS systems concerns the benefits a user receives by participating, which must be tangible: users are more likely to collaborate in a project if they derive some form of gain from it, whether it be monetary or of a different nature [12, 13]. This, however, is a double-edged sword, since while it incentivizes user participation for better data collection, it also encourages some malicious users to send poor quality information to increase their participation level in the platform and, consequently, their payoff [14, 15]. Indeed, data analysis must take into account the reliability of users and weight each of their contributions according to their trustworthiness. In this regard, the use of

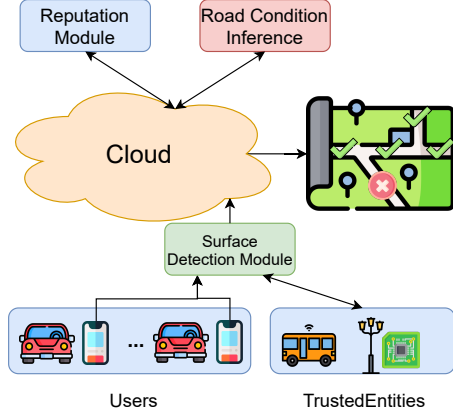


Fig. 1: Architecture of the system.

Algorithm 1 Road Condition Monitoring

Require: reports from users and TEs
Ensure: truth values for all sectors

```

1: for each report do
2:   if report can be validated by TE then
3:     update user reputation
4:   end if
5: end for
6: for each user do
7:   if user reputation < threshold then
8:     reject user reports
9:   end if
10: end for
11: for each sector do
12:   calculate sector truth value
13: end for
14: return truth values for all sectors

```

a reputation management system (RMS) [16] makes it possible to estimate the reliability level of each participant and use it in the data aggregation phase to infer a truth value that is as accurate as possible.

3 The Proposed Architecture

We propose a mobile crowdsensing system for road condition monitoring that is resilient to malicious user attacks. We envision a client-server architecture in which users collect raw sensory data, extract feature vectors from it, and share that intermediate information with the cloud server, which will use it to infer high-level information about road surface conditions. Figure 1 shows the architecture of the proposed system, which consists of three main modules, i.e., *Surface Detection*, *Reputation*, and *Road Condition Inference*.

We treat the sensing area of interest as being partitioned into s sectors, which can be of variable forms and dimensions depending on the sensing granularity of the application. At the lowest level, sensors equipped on users' smartphones continuously collect inertial data for each sector they pass through, and send them to the server for further processing. Starting from the raw data collected by users' smartphones, the *Surface Detection* module extracts a triplet of values that will be exploited by the higher layers of the architecture. In particular, the main information of interest, for each user report, are: the time interval in which the report is valid, its geographical location and an aggregate value indicating the presence or absence of hazards along the road.

The validity period depends on the context, and may vary depending on the granularity required by the application. Then, based on the geographical coordinates acquired by the GPS sensor, a reference sector is assigned to the report. Finally, the aggregate value of the report is derived by exploiting clustering techniques, as will be explained in the next section.

The *Reputation* module has the task of determining the trustworthiness of users, assigning them a reputation value that allows the system to clearly distinguish good users from malicious or unreliable ones. To this end, we adopt the concept of *Trusted Entity* (TE), which represent the root of trust of the system. TEs are trustworthy devices (such as black boxes equipped on buses and taxi cabs, or smart devices embedded in lamp posts) that periodically send reports that we consider always trustworthy. Other systems in the literature have also utilized the concept of trusted users in recent years, with favorable results [17].

These reports are used to validate the correctness and accuracy of the reports sent by ordinary users, as well as to update their reputation accordingly. TEs will only be a small fraction of the total number of users of the application, for obvious scaling and cost issues. However, their input is extremely valuable in providing feedback on users in their vicinity. If, on the other hand, a user is not in proximity of a TE, their report will be weighted according to their reputation.

Finally, the *Road Condition Inference* module accepts as input both the triplets of values produced by the *Surface Detection* module and the users' reputations. The latter are used to exclude, from the calculation of the final truth values, unreliable users, who have a reputation lower than a certain threshold. Then, starting from values sent by reliable users, the *Road Condition Inference* module uses truth discovery techniques to obtain a single truth value about the state of the road surface in each of the sectors considered. Algorithm 1 shows the pseudo-code explaining how the whole system works.

3.1 Surface Detection Module

The *Surface Detection* (SD) module aims to discover the road condition by using inertial data gathered from sensors in users' smartphones. The problem addressed by the SD can be solved by an anomaly detection algorithm that uses a machine learning approach to identify patterns in sensor data, whose strongly differ from the majority of data-points [18]. Hence, the first step of the SD is to continuously collect 3D values from both accelerometer and gyroscope sensors and then process them to extract the information of interest that will be sent to the cloud [19]. Peaks in acceleration over the three axes, in a vehicle that is moving on a road that should be in good conditions, may indicate the presence of a hole in the road surface or other hazards. Data retrieved from gyroscope not only enrich the information about the context of the vehicle but can also be employed to make the system independent from device orientation and placement [20]. Finally, GPS data is used to determine the corresponding sector in the sensing area.

To ensure a synchronization among different sensors, the SD is able to process input data within certain time windows in order to extract the features that will be used in the next classification stage. The temporal pattern produced by the accelerometer and gyroscope sensors is processed into fixed-length windows of $m \times n$ samples, where m is the number of axes along which measurements are performed. Choosing the proper length for the acquisition window is essential because of the impact it could have on the whole system [21]. Short windows

may improve system performance, but may not contain enough information to properly capture the characteristics of the road. Vice versa, large windows may alter system performances since information about multiple sectors visited in sequence might be analyzed within a single window.

Raw data within the fixed-length time windows are then processed to obtain a very compact representation of input data. In particular, the feature vectors are built by considering five well-accepted values, i.e. maximum, minimum, mean, standard deviation, and root mean square over the three accelerometer and gyroscope axes. Therefore, each feature vector contains 30 elements, i.e., 15 values of acceleration and 15 values of angular velocity. Finally, the feature vectors are passed to the K-Means algorithm for the detection of surface conditions. Given the set of feature vectors $(f_1, f_2, \dots, f_m)$, the most common application of the K-means algorithm consists in partitioning the m observations into k sets, $C = (C_1, C_2, \dots, C_k)$, so as to minimize the intra-cluster error:

$$E = \sum_{k=1}^K \sum_{f_i \in C_k} \|f_i - \mu_k\|^2 \quad (1)$$

where μ_k is the mean value of the k -th cluster C_k . Nevertheless, K-means can also be used for classification, i.e., supervised learning. Our algorithm outputs a binary value, where 0 indicates that the road surface is in good conditions, while 1 indicates it is not.

3.2 Reputation Module

Once the high-level information about the road surface condition has been stored in the cloud system, we can determine if this data has been sent by trustworthy users. In order to accomplish this task, we leverage a *Reputation module* which, by comparing the information that users collected and the known information about the same areas, is able to assess the trustworthiness of each participant. We can consider the task performed by users as a service rendered, where our system evaluates its quality by releasing feedback. In order to enable our system to release positive or negative feedback on the user's service, we need to compare at least some of the values provided by users with a ground truth. To this end, we introduce trusted entities (e.g., buses equipped with black boxes or smart lamp posts) that frequently monitor the condition of the road surface of given areas. This information is directly comparable with that coming from users, and will provide the system with the ground truth necessary to release feedback.

In our implementation, feedback is defined as $f_{ij}(t) \in \{-1, +1\}$, where i denotes the user who provided the information, j is the sector that was evaluated, and t is the timestamp. The value $+1$ indicates that the information provided by the user is equal to that known by the system and derived from a trusted entity, while the value -1 is stored in the opposite case.

Our module calculates user reputation according to a formulation of the reputation idea derived from Jøsang's Beta Reputation [14], one of the most widely

used RMSs in the literature. This RMS is based on the Beta probability density function and combines information about users' past transactions to obtain reputation scores. The original formulation requires that opinions can be released by all entities receiving a service, then each of them proceeds to calculate a local reputation and consequently, this information is merged to calculate a global reputation. To model the problem more closely to the original formulation, we could consider individual trusted entities capable of releasing feedback. However, since we currently assume these entities to be always reliable, considering them separately would complicate the formulation unnecessarily. Therefore, in our model of the RMS, users provide their service to our system, which is the only entity capable of issuing feedback on their behavior. This simplified approach allows us to obtain a single definition of reputation calculated according to the following formula:

$$r_i(t) = \frac{\sum_{t'=0}^t f_{ij}(t') \lambda_{Beta}^{(t-t')}}{2 + \sum_{t'=0}^t |f_{ij}(t') \lambda_{Beta}^{(t-t')}|}. \quad (2)$$

The reputation of a given user is therefore calculated by taking into account the number of positive and negative feedback, over the total number of services provided by the user. The factor λ_{Beta} is a *forgetting factor* and is defined in the range $[0, 1]$. This factor allows the system to assign lower weight to past feedback. From Equation 2 it is easy to see that the range of reputation values is in $[-1; 1]$ and that the default reputation is equal to zero when the user has not yet provided any information to the system.

3.3 Road Condition Inference

Prior to using truth discovery techniques, the *Road Condition Inference* module performs a pre-filtering phase on user data to obtain a first screening of the information to consider for the computation of the final truth values. During this phase, exploiting the reputation values and a threshold value τ , our system removes all those users whose reputation value r_i is lower than τ . Since the default reputation value is 0, a reasonable choice is to set the threshold as equal or less than 0, to include data from all those users, who have never actually been evaluated by trusted entities (TEs), but still contributed to collect valuable information. Although the inclusion of opinions from unknown users may seem risky at this stage, the *Road Condition Inference* module will properly weigh the contribution of these users and estimate the final truth value for each sector.

To obtain reliable information, the *Road Condition Inference* module exploits state-of-the-art truth discovery techniques based on CRH [22]. The input of the module consists of a set of triplets, namely the status of the road condition, the spatial coordinates, and a temporal coordinate. As previously discussed, we treat the area of interest as divided into s sectors of different forms and dimensions.

Let us suppose there are u users and the system runs in fixed time steps, so that only corresponding values of a specified time step are processed. The truth discovery algorithm aims to find a truth value t_j for each of the j sectors based on the values estimated by users and on the weights assigned to them by the system in order to appropriately merge collected data.

The algorithm consists of two phases, one of weight estimation and one of truth estimation that proceed iteratively, until some convergence criterion is reached (e.g., fixed number of iterations or when there are no more changes in the truth values). The first step entails assigning a weight w_i to each of the participants that varies based on how close their reported opinions are to the estimated truth values. We use the following formula to calculate the weights:

$$w_i = -\log \frac{\sum_{j=0}^s d(v_{i,j}, t_j)}{\sum_{i'=0}^u \sum_{j=0}^s d(v_{i',j}, t_j)}. \quad (3)$$

There are several ways to calculate distances depending on the application context and the nature of the data (e.g., continuous or categorical data). Since our data is discrete, the distance function that best fits our case is defined as follows: $d(v_{i,j}, t_j) = 1$ if $v_{i,j} \neq t_j$, or 0 otherwise. Once the weights are obtained, the system can calculate the truth values using the following formula:

$$t_j \leftarrow \arg \max_v \sum_{i=1}^u w_i \cdot \delta(v, v_{i,j}), \quad (4)$$

where the function $\delta(x, y)$ returns 1 if x and y are equal and 0 otherwise. Equation 4 is equivalent to a weighted majority voting, where the final truth value is the one that receives the most votes among all participants, considering that the vote of each user is weighted w_i . These two steps are repeated until the convergence criterion is reached. The truth values obtained for each sector are then used to create a heatmap of road hazards which is available to all users.

4 Experimental Evaluation

To evaluate the effectiveness of our approach, we performed a series of experiments leveraging real-world mobility traces. The dataset we chose contains the mobility traces of about 500 taxi cabs, collected during a 30-day period in San Francisco, USA [23]. The evaluation of our system is carried out by simulating an application where participants (both normal users and TEs) periodically send reports about the state of the road surface, signaling the possible presence of hazards as a boolean value. In the experiments we consider a sensing area of about 4x4 km, divided into 500 sectors of variable size. The results that we present are the average of 100 runs performed, with 1000 users in an interval of 100 time steps. The paths followed by users are taken directly from the mobility traces. As for the values sent by each user, we have assumed that normal users send correct reports with a given probability (i.e., 90%) to take into account possible inaccuracies. Attackers, on the other hand, send false data more frequently.

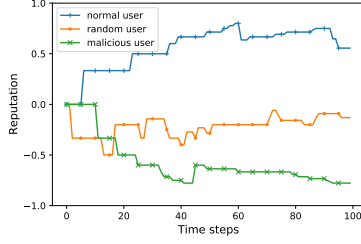


Fig. 2: Reputation trends.

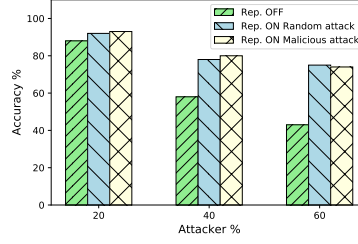


Fig. 3: Accuracy of the system.

In the following experiments, we modeled two types of attackers: the first type almost always sends false data (90% of the time) in order to maliciously change the truth values inferred by the system, while the second type sends data randomly in an attempt to gain incentives from the application without really participating. Figure 2 shows the reputation trend of three users, during 100 timesteps. As can be seen from the figure, the normal user’s reputation grows steadily when reports are validated by TEs. On the other hand, when no TE is nearby, the user’s reputation remains constant, which results in a stair-step trend. The malicious user who almost always sends false data is easily detected by the *Reputation* module, and his/her reputation tends to decrease over time. These kinds of attackers are easily removed during the filtering phase. Finally, the user who sends data randomly is obviously more difficult to categorize. Indeed, in this case, its reputation oscillates around the initial reputation value (i.e., 0).

Figure 3 summarizes the results obtained by the system as a whole, in terms of accuracy, as the number of attackers increases. The different bars show, respectively, the behavior of the system both with and without the *Reputation* module to pre-filter untrustworthy users. As expected, the impact of the *Reputation* module is directly proportional to the number of attackers. When attackers are a small portion of the total user base, the truth discovery system is able to infer accurate information on its own, as normal users outnumber attackers in the majority of sectors. When, on the other hand, there are a considerable number of attackers, the reputation system has a strong influence on the result. Indeed, without the pre-filtering phase, attackers would overwhelm normal users and manage to reverse the final outcome, as is generally the case in majority voting systems. However, the combined use of the reputation and truth discovery modules produces great results, as shown in Figure 3. In particular, we note how our system achieves similar results with both random and malicious attackers. This can be explained by the fact that users submitting random data are difficult for the *Reputation* module to detect, but cause less problems for the truth discovery system. Users that almost always send false data, instead, are easier to manage on the reputation side, but if they somehow pass the filtering phase they have a greater influence on the final truth calculation. The two effects are balanced, as shown in Figure 3, hence the similar results.

5 Conclusion

In this paper we studied the problem of efficiently and scalably monitoring the condition of road surfaces, inferring high-level information that allows technicians to intervene in a timely manner when maintenance is required.

To this end, we proposed a road surface monitoring system that aggregates user-submitted data by exploiting the Mobile Crowdsensing paradigm. The system we propose is resilient to attacks thanks to its reputation management system that tracks user behaviors and allow us to filter out untrustworthy users, improving the overall quality of information. The system collects raw data coming from users' smartphones, extracts feature vectors from it, and share that intermediate information with the cloud server. Our approach involves the combined use of a reputation management system and a truth discovery system to infer reliable high-level information [24]. Extensive experiments carried out by exploiting real world taxi cabs traces have demonstrated the viability of the system even when malicious users try to alter the information inferred.

Acknowledgment

This research is partially funded by the Project CrowdSense (PO FESR Sicilia 2014/2020).

References

1. Li, H.N., Ren, L., Jia, Z.G., Yi, T.H., Li, D.S.: State-of-the-art in structural health monitoring of large and complex civil infrastructures. *Journal of Civil Structural Health Monitoring* 6(1), 3–16 (2016)
2. Eriksson, J., Girod, L., Hull, B., Newton, R., Madden, S., Balakrishnan, H.: The pothole patrol: using a mobile sensor network for road surface monitoring. In: *Proceedings of the 6th international conference on Mobile systems, applications, and services*. pp. 29–39 (2008)
3. OBrien, E.J., Malekjafarian, A., González, A.: Application of empirical mode decomposition to drive-by bridge damage detection. *European Journal of Mechanics-A/Solids* 61, 151–163 (2017)
4. Laubis, K., Konstantinov, M., Simko, V., Gröschel, A., Weinhardt, C.: Enabling crowdsensing-based road condition monitoring service by intermediary. *Electronic Markets* 29(1), 125–140 (2019)
5. Lo Re, G., Peri, D., Vassallo, S.D.: Urban air quality monitoring using vehicular sensor networks. In: *Advances onto the Internet of Things*, pp. 311–323. Springer (2014)
6. Strazdins, G., Mednis, A., Kanonirs, G., Zviedris, R., Selavo, L.: Towards vehicular sensor networks with android smartphones for road surface monitoring. In: *2nd International Workshop on Networks of Cooperating Objects*. vol. 11 (2011)
7. Agate, V., Khamesi, A.R., Silvestri, S., Gaglio, S.: Enabling peer-to-peer user-preference-aware energy sharing through reinforcement learning. In: *ICC 2020 - 2020 IEEE International Conference on Communications (ICC)*. pp. 1–7 (2020)

8. Concone, F., Lo Re, G., Morana, M.: Smcp: a secure mobile crowdsensing protocol for fog-based applications. *Human-centric Computing and Information Sciences* 10(1), 1–23 (2020)
9. De Paola, A., Ferraro, P., Gaglio, S., Lo Re, G.: Context-awareness for multi-sensor data fusion in smart environments. In: *Conference of the Italian Association for Artificial Intelligence*. pp. 377–391. Springer (2016)
10. Becnel, T., Tingey, K., Whitaker, J., Sayahi, T., Lê, K., Goffin, P., Butterfield, A., Kelly, K., Gaillardon, P.E.: A distributed low-cost pollution monitoring platform. *IEEE Internet of Things Journal* 6(6), 10738–10748 (2019)
11. Agate, V., Concone, F., Ferraro, P.: Wip: Smart services for an augmented campus. In: *2018 IEEE International Conference on Smart Computing (SMARTCOMP)*. pp. 276–278 (2018)
12. Timilsina, A., Khamesi, A.R., Agate, V., Silvestri, S.: A reinforcement learning approach for user preference-aware energy sharing systems. *IEEE Transactions on Green Communications and Networking* (2021)
13. Restuccia, F., Ferraro, P., Silvestri, S., Das, S.K., Lo Re, G.: IncentMe: Effective mechanism design to stimulate crowdsensing participants with uncertain mobility. *IEEE Transactions on Mobile Computing* 18(7), 1571–1584 (2018)
14. Josang, A., Ismail, R.: The beta reputation system. In: *Proceedings of the 15th bled electronic commerce conference*. vol. 5, pp. 2502–2511 (2002)
15. Agate, V., De Paola, A., Gaglio, S., Lo Re, G., Morana, M.: A framework for parallel assessment of reputation management systems. In: *Proceedings of the 17th International Conference on Computer Systems and Technologies 2016*. p. 121–128. *CompSysTech '16* (2016)
16. Agate, V., De Paola, A., Lo Re, G., Morana, M.: A simulation software for the evaluation of vulnerabilities in reputation management systems. *ACM Trans. Comput. Syst.* 37(1–4) (Jun 2021), <https://doi.org/10.1145/3458510>
17. Restuccia, F., Ferraro, P., Sanders, T.S., Silvestri, S., Das, S.K., Lo Re, G.: FIRST: A framework for optimizing information quality in mobile crowdsensing systems. *ACM Transactions on Sensor Networks (TOSN)* 15(1), 1–35 (2018)
18. Martorella, G., Peri, D., Toscano, E.: Hardware and software platforms for distributed computing on resource constrained devices. In: *Advances onto the Internet of Things*, pp. 121–133. Springer (2014)
19. Concone, F., Ferraro, P., Lo Re, G.: Towards a smart campus through participatory sensing. In: *2018 IEEE International Conference on Smart Computing (SMARTCOMP)*. pp. 393–398. IEEE (2018)
20. Guo, H., Chen, L., Chen, G., Lv, M.: Smartphone-based activity recognition independent of device orientation and placement. *International Journal of Communication Systems* 29(16), 2403–2415 (2016)
21. Concone, F., Gaglio, S., Lo Re, G., Morana, M.: Smartphone data analysis for human activity recognition. In: *AI*IA 2017 Advances in Artificial Intelligence*. pp. 58–71. Springer (2017)
22. Li, Y., Li, Q., Gao, J., Su, L., Zhao, B., Fan, W., Han, J.: Conflicts to harmony: A framework for resolving conflicts in heterogeneous data by truth discovery. *IEEE Transactions on Knowledge and Data Engineering* 28(8), 1986–1999 (2016)
23. Piorkowski, M., Sarafijanovic-Djukic, N., Grossglauser, M.: A parsimonious model of mobile partitioned networks with clustering. In: *2009 First International Communication Systems and Networks and Workshops*. pp. 1–10. IEEE (2009)
24. Agate, V., Ferraro, P., Gaglio, S.: A cognitive architecture for ambient intelligence systems. In: *AIC*. pp. 52–58 (2018)